







Automation systems for garage doors


















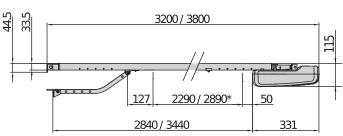

* corsa utile / usable travel / course utile / nutzhub / carrera útil / werkslag

Electromechanical operators for intensive/very intensive use, designed for the automation of sectional garage doors.

Features a very compact design, suitable for installation in any situation, thanks to the wide range of chain rails available in various lengths.

The control unit and limit switch with encoder with mechanical stop are incorporated in the operator and rail respectively.

The intensity of use makes them suitable for any type of installation, both residential and municipal. The quick Set-Up function from the ground makes installation fast and easy. The high opening speed minimises waiting times and maximises comfort for the end user. The exclusive anti-intruder function (SMART models) secures the garage from unwanted accesses.

The new GREEN models are environmentally friendly, drastically reduce emissions and energy requirements, thanks to a consumption on standby lower than 1W and the total use of recyclable material.

Relevant features



Fast and powerful motors: fast opening to minimise waiting times and intensive use of the automation for all types of application



Improved fast mechanical installation: by even just one person thanks to the new rapid Autoset procedure.



Encoder and exclusive D-Track force management system: for safe installation in all conditions.









Automation systems for garage doors



Relevant features



Integrated burglar alarm: models with a full-display control unit offer the unique burglar alarm function; the circuit board can become the control unit of a wired burglar alarm system.









Automation systems for garage doors



BOTTICELLI SMART BT A

Code	<u>Ci</u>	Name	Description
R915211 00002	2611799	BOTTICELLI BT A 650 + 2 MITTO 2CH	Kit for non-reversible sectional garage doors with 650 N tractive force and intensive usage. Door surface area 10 m². Opening speed 210 mm/sec.
R915213 00002	2611799	BOTTICELLI SMART BT A 850 + 2 MITTO 2CH	Kit for non-reversible sectional garage doors with 850 N tractive force and intensive usage. Door surface area 13 m². Opening speed 210 mm/sec.
R915212 00002	2611799	BOTTICELLI SMART BT A 1250 + 2 MITTO 2CH	Kit for non-reversible sectional garage doors with 1250 N tractive force and very intensive usage. Door surface area 16 m². Opening speed 190 mm/sec.

VITAL ACCESSORIES

/	<u>Cp</u> P115036 00001 - <u>Ci</u> 2601284 BIN 650-850 CATENA 2900		<u>Cp</u> P115036 00004 - <u>Ci</u> 2601285 BIN 650-850 CATENA 2X1450
	Chain rail for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 2900 mm, effective travel 2400 mm		Chain rail divided into two halves for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 2900 mm, travel 2400 mm
/	<u>Cp</u> P115036 00005 - <u>Ci</u> 2601287 BIN 650-850 CATENA 2X1750	7	<u>Cp</u> P115037 00001 - <u>Ci</u> 2601288 BIN 650-850 CINGHIA 2900
	Chain rail divided into two halves for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 3500 mm, travel 3000 mm		Belt rail for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 2900 mm, effective travel 2400 mm
/	<u>Cp</u> P115037 00003 - <u>Ci</u> 2601289 BIN 650-850 CINGHIA 2X1450		Cp P115037 00004 - Ci 2601291 BIN 650-850 CINGHIA 2X1750
	Belt rail divided into two halves for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 2900 mm, travel 2400 mm		Belt rail divided into two halves for Botticelli BT A 650-850 compatible with Botticelli 600-800, length 3500 mm, travel 3000 mm
	<u>Cp</u> P115035 00003 - <u>Ci</u> 2601293 BIN 1250 2x1450 CATENA		<u>Cp</u> P115035 00004 - <u>Ci</u> 2601295 <u>BIN 1250 2x1750 CATENA</u>
	Chain rail divided into two halves for Botticelli Smart BT A 1250 compatible with EOS 120, length 2900 mm, travel 2400 mm	8	Chain rail divided into two halves for Botticelli Smart BT A 1250 compatible with EOS 120, length 3500 mm, travel 3000 mm

RECOMMENDED ACCESSORIES

BABH MAN	<u>Cp</u> N999060 00001 - <u>Ci</u> 2601296 APT S		<u>Cp</u> P115005 - <u>Ci</u> 2600817 SM1
	Assembly for fitting BOTTICELLI BT A to the ceiling	0	External manual release for overhead garage door (1 operator)
*0	<u>Cp</u> N733069 - <u>Ci</u> 2600786 SET/S		Cp P125005 - Ci 2600078 BT BAT
	External release for insulated sectional and overhead doors of thickness up to 50 mm.		Back-up battery kit for HYDRA N, ARGO, VENERE BT A DIS
	Cp D114093 00003 - Ci 2607539 RADIUS LED BT A R1 Flashing light with incorporated antenna for motors with 24 V power supply.		<u>Cp</u> P111782 - <u>Ci</u> 2601411 <u>COMPACTA A20-180</u>
			Pair of photocells adjustable 180° horizontally. 20 metre range. 12-33 VAC/15-35 VDC power supply.










Automation systems for garage doors

EasyAXS



EASY CONNECT. EASY ACCESS.

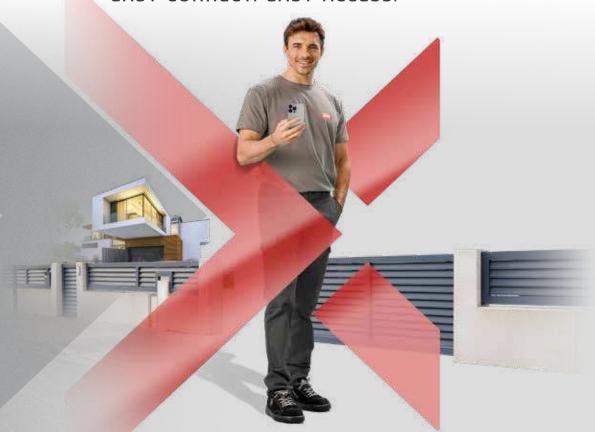

The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.



FOR ACCESSING THEIR

Somfy TaHoma

HOMES





Automation systems for garage doors



MOBILE MODULE

+ ANTENNA + SIM

EASY TO CONNECT











10/15 metres



















Automation systems for garage doors





AN UPDATED VERSION OF U-LINK TO GIVE YOU EVEN MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.







Automation systems for garage doors





A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app



The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are REPLAY, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers







INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT 5.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT 5.p.A. is protected by copyright law. BFT 5.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT 5.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT 5.p.A., and only BFT 5.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.