




Be ahead



# MURA A30



## Photocells for automatic gates and safety devices

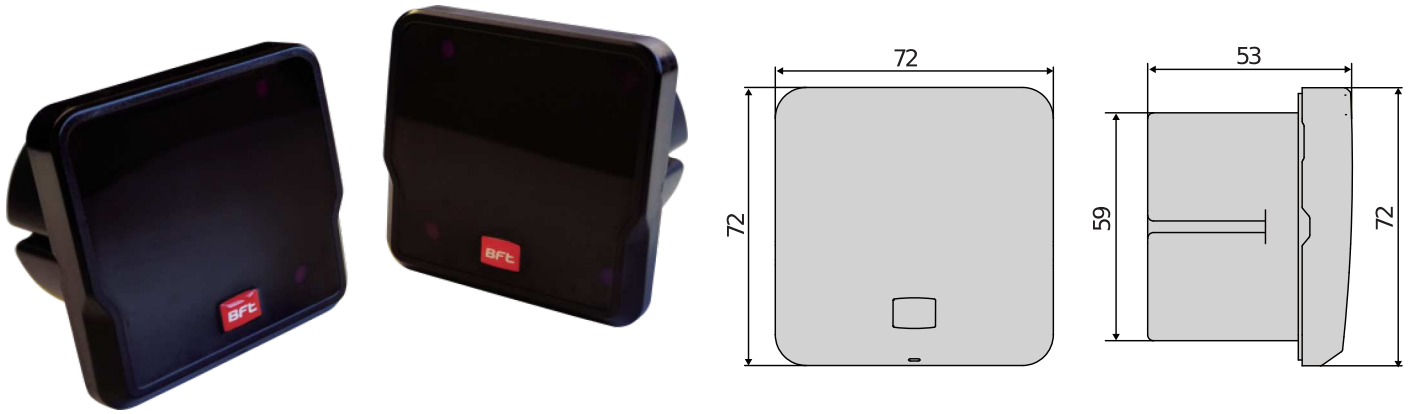


Pair of recessed photocells, ideal solution in a stylish environment. Due to their small size and ability to adjust the beam means easy installation. Extended main supply range of 12-33Vac and 15-35Vdc. Nominal range 30 metres.

### Relevant features




**Design:** MURA is the new recessed photocell from BFT, perfect for installations that require a high degree of product integration. The protrusion from the wall or pillar is reduced to the bare minimum but is still a clear BFT style and design.



**Versatility:** A range of up to 30 metres allows the photocell to operate correctly even on large gates. It can be powered with a wide range of voltage supplies, 12-33Vac 50/60Hz and 15-35Vdc, making it usable in a very large number of installations. In addition, it can be connected with all BFT control boards that provide for verified management of safeties. Finally, the possibility of adjusting the angle of the optics by means of three screws makes it possible to recover any misalignment between the receiving and transmitting photocells.



**Compatibility:** the photocell has been designed to be compatible with the previous CELLULA 50 and FOTO-I photocells, making it as easy to work on the older photocells.

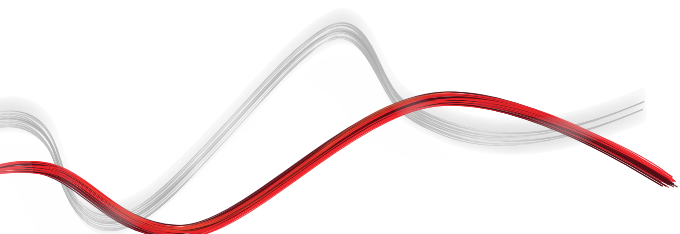

## Photocells for automatic gates and safety devices


### MURA A30

Code	Ci	Name	Description
P111812	2613388	MURA A30	Pair of recessed photocells. Range up to 30 metres. Power supply 12-33Vac / 15-35Vdc

MURA A30	
Supply voltage	12 - 33Vac / 15 - 35Vdc
Nominal Range	30 m
Adjustment range	+/-7°
Degree of protection (IP)	44

### RECOMMENDED ACCESSORIES

<p><b>Cp</b> P903028 - <b>Ci</b> 2600992 <b>PHP A</b></p> <p>Pair of aluminium posts for THEA, DESME and COMPACTA series photocells Height 522 mm</p>	<p><b>Cp</b> P903029 - <b>Ci</b> 2601357 <b>PHP2 A</b></p> <p>Pair of double aluminium posts for THEA, DESME and COMPACTA series photocells. Height 1038 mm</p>
<p><b>Cp</b> P903030 - <b>Ci</b> 2611473 <b>PHP4 A</b></p> <p>Pair of aluminum posts of different heights, for Q.bo series selectors and THEA, DESME and COMPACTA series photocells. Column for selector: height 1038 mm, column for photocells: height 552 mm</p>	<p><b>Cp</b> P903020 - <b>Ci</b> 2611468 <b>APL</b></p> <p>Pair of foundation plates for PHP posts</p>
<p><b>Cp</b> P903034 - <b>Ci</b> 2613426 <b>ADA PHP MURA</b></p> <p>Pair of adapters for installing MURA photocells on PHP series posts.</p>	<p><b>Cp</b> P111815 - <b>Ci</b> 2613435 <b>CCI MURA CONTAINER FLUSH-FIT</b></p> <p>Pair of recessed housings for MURA photocells.</p>

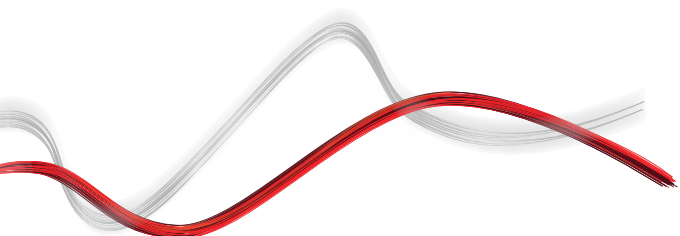

Photocells for automatic gates and safety devices

# EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.



## Photocells for automatic gates and safety devices

### EASY TO CONNECT

#### WIFI MODULE



→ 10/15 metres

#### WIFI MODULE + ANTENNA



→ 20/25 metres

#### MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY  
INSTALLATION**



**ALWAYS  
CONNECTED**



**EVEN MORE  
CONNECTIVITY**



**EASY TO SET UP  
FOR INSTALLERS**



**EASY TO CONTROL  
FOR CUSTOMERS**





Photocells for automatic gates and safety devices



# U-LINK 2.0

**AN UPDATED VERSION OF  
U-LINK TO GIVE YOU EVEN  
MORE FUNCTIONALITY**



## Scalable

You can add as many devices as you want



## Intuitive

Easy to install and to use



## Functional

Settings can be controlled and firmware updated remotely using dedicated applications



## Practical

Works with or without an internet connection



## Flexible

It allows you to create groups of interconnected products

**U-Link**, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.

Photocells for automatic gates and safety devices

# **-SECURITY**

## A NEW AND EVEN MORE SECURE RADIO PROTOCOL



→ **Secure**  
By transmitting data protected by a cryptographic key

**U-Security** is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



→ **Easy**  
Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app



→ **Universal**  
The radio protocol is also compatible with the previous generation of receivers



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. **FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.**