




VEGA





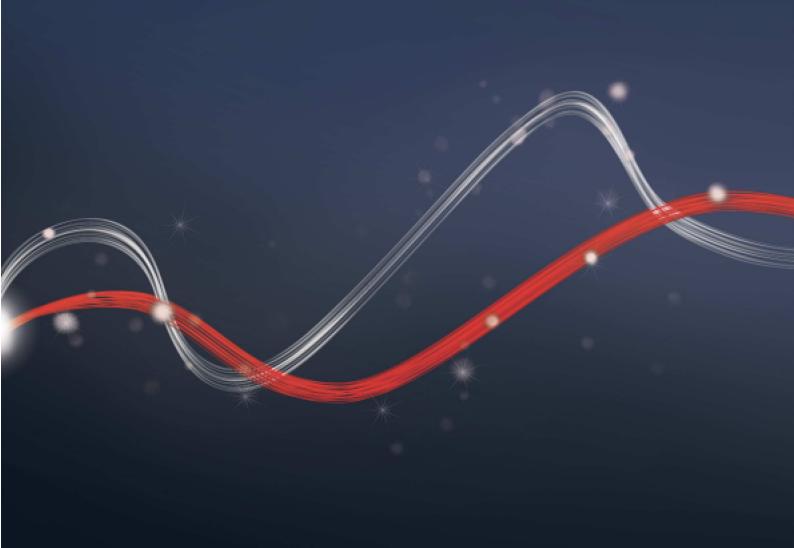







Control panels












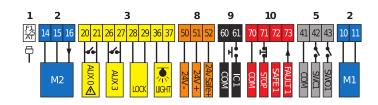

Control panel with display for one or two 24V electromechanical operators for 230V/200W overhead garage doors.

The dual-channel radio receiver is incorporated.

It has a crush-proof system based on D-Track technology, controls the slowing down when opening and closing and has an electronic self-learning function.

The main functions include automatic closing, fast closing, pulse blocking, pulse locking and locked shut maintenance. Supports the U-LINK and EELINK protocols.

Relevant features

The terminal boards are coloured and can be removed to make it easier to perform the wiring.

VEGA

| Code | <u>Ci</u> | Name | Description | |
|---------------|-----------|-----------------------|--|--------|
| D113836 00002 | 2607527 | VEGA BTL2 QUADRO CPEL | Control panel for one or two overhead garage door operators. | U-Link |
| | | VEGA | Display control card for 1 or 2 operators for up-and-over garage doors | |













Control panels



| | VEGA BTL2 QUADRO CPEL |
|---------------------------------|---|
| BASIC CHARACTERISTIS | |
| Maximum output | 200 (20P) 130(10P) W |
| Board power supply | 220-230 V |
| Max. n. transmitters | 63 |
| Programming | Display |
| Power supply accessories | 24V - 0,2A |
| CONFIGURATION OF SAFETY INPUTS | _ · · · · · · · · · · · · · · · · · · · |
| Light sensor | • |
| Safety edge | • |
| Resistive edge | |
| Tested photocell | • |
| Tested safety edge | |
| Stop | |
| CONFIGURATION OF CONTROL INPUTS | • |
| Start | • |
| Traffic light control | |
| Open | |
| Close | |
| Pedestrian open | • |
| Open with timer | |
| Pedestrian open with timer | |
| OUTPUTS | _ |
| Blinker | 24V - 1A |
| Configurable AUX 3 | 24V - 1A |
| Solenoid Lock | 24V-10W |
| Courtesy Light | • |
| OUTPUTS CONFIGURATION | - |
| Gate open warning light | • |
| Courtesy light | • |
| Electric release lock | • |
| Electric magnetic lock | • |
| Maintenance | • |
| Stairs light | • |
| Blinker | • |
| Flashing + Maintenance | • |
| Tamper-proof | • |
| Time delay radio channel | • |
| Bistable radio channel | • |
| Gate status | • |
| Zone light | • |
| Gate open alarm | • |
| | · |












Control panels



Connecting diagram

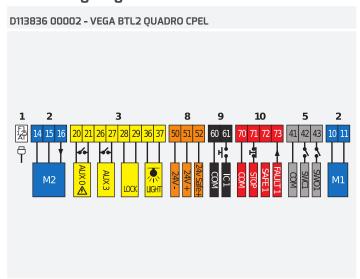









INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT 5.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT 5.p.A. is protected by copyright law. BFT 5.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT 5.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT 5.p.A., and only BFT 5.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.