

VISTA


Automation for automatic pedestrian doors



Be ahead

Vista Sl

- Complete range of automations for fast sliding and swing pedestrian doors with leaves having a maximum weight of 150 kg. The control unit, with a programming display and microprocessor technology, makes it possible to control all the main functions automatically. The cushioned rail and shaped wheels guarantee absolute silence in movement. Control unit with programming display and autaset system for movement and torque parameters. Incorporated dual channel radio receiver. WMP rapid assembly profile. Electric locking with the holding of doors at each stop position. Available assembled to size or in an assembly kit.

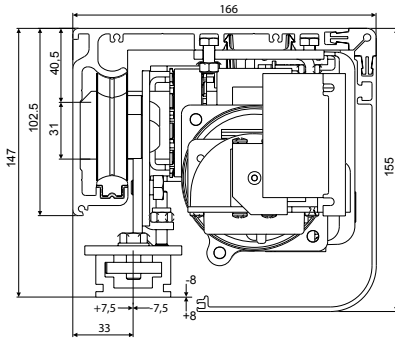

TECHNICAL CHARACTERISTICS


	VISTA SL 1	VISTA SL 2
Motor power supply	24V	24V
Operation cycle	Continuous	Continuous
Power input	230W	230W
Min. opening width	75 cm	80 cm
Max. opening width	255 cm	290 cm
Max. leaf weight	150 kg	120+120 kg
Max. movement speed	100 cm/sec	200 cm/sec
Bar dimens.	166x155 mm	166x155 mm
Partial opening	10-70% opening width	10-70% opening width
Anti-crushing	encoder and microprocessor	encoder and microprocessor
Operating temperature	0°/55°C inside box	0°/55°C inside box

Vista SL C

→ Compact automation for pedestrian doors for leaves weighing up to 100Kg. Only 80 mm high: The extremely reduced height makes installation possible even with low ceilings or particularly thin fixtures. The control unit, with programming display allows automatic adjustment of all the main functions. The WMP anchor profile makes door installation quick and easy, reducing laying times and ergonomically optimising the assembly stages.

Built-in radio receiver: Thanks to the radio receiver incorporated in the control unit, the VISTA SL C door can be remotely controlled in wireless mode via the various BFT control systems, such as RB or T-BOX.

Available assembled to size or in an assembly kit.

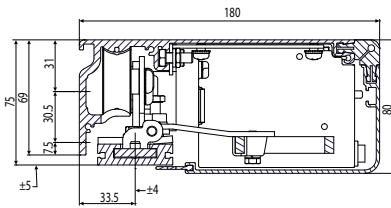


TECHNICAL CHARACTERISTICS

	VISTA SL C 1	VISTA SL C 2
Motor power supply	24V	24V
Operation cycle	Continuous	Continuous
Power input	230W	230W
Min. opening width	75 cm	80 cm
Max. opening width	255 cm	290 cm
Max. leaf weight	100 kg	80+80 kg
Max. movement speed	80 cm/sec	160 cm/sec
Bar dimens.	18x80 mm	18x80 mm
Partial opening	10-70% open. width	10-70% open. width
Anti-crushing	encoder and microprocessor	encoder and microprocessor
Operating temperature	-20°/55°C	-20°/55°C

Vista Tl

- The telescopic sliding Vista TL has been developed to allow the automation of sliding doors fitted in entrances with very limited space. It allows the automation of leaves with a maximum weight of 120 kg. Minimum opening width 800 mm and maximum 4400 mm. Control unit with programming display and autaset system for movement and torque parameters. Incorporated dual channel radio receiver. Electric locking with the holding of doors at each stop position. Available assembled to size.

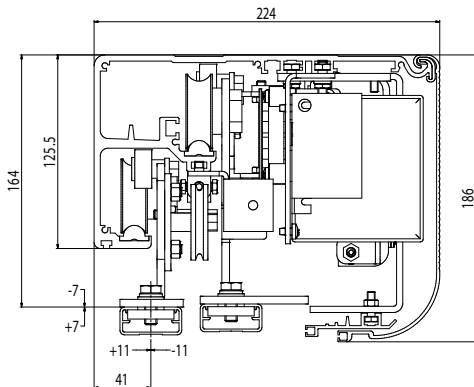

TECHNICAL CHARACTERISTICS

	VISTA Tl2	VISTA Tl4
Motor power supply	24V	24V
Operation cycle	Continuous	Continuous
Power input	230W	230W
Min. opening width	80 cm	160 cm
Max. opening width	330 cm	440 cm
Max. leaf weight	120 kg	80 kg
Max. movement speed	100 cm/sec	200 cm/sec
Bar dimens.	224x186 mm	224x186 mm
Partial opening	10-70% open. width	10-70% open. width
Anti-crushing	encoder and microprocessor	encoder and microprocessor
Operating temperature	0°/50°C	0/50°C

Vista SW MXL/SXL

- Range of automations for swing pedestrian doors, suitable also for automating existing entrances and ideal for intensive use and for heavy leaves with large dimensions. Available both with motorised management of opening and closing and with controlled closing with a return spring. The control unit, with a programmable display and microprocessor technology, makes it possible to control all the main functions automatically.
- Model Sw Sxl: in case of power failure, the spring always allows manual opening with spring operated self closing.



TECHNICAL CHARACTERISTICS

	VISTA Sw Mxl	VISTA Sw Sxl
Motor power supply	24V	24V
Torque	45 Nm	45 Nm
Closing	motor	spring or motor
Operation cycle	Continuous	Continuous
Power input	230W	230W
Min. opening width	70 cm	70 cm
Max. opening width	140 cm	140 cm
Max. leaf weight	250 kg	250 kg
Max. opening angle	110°	110°
Opening speed/time	Adj. 20°/sec+70° sec (3+6 sec)	Adj. 20°/sec+70° sec (3+6 sec)
Closing speed time	Adj. 10°/sec+40° sec (4+15 sec)	Adj. 10°/sec+40° sec (4+15 sec)
Bar dimens.	684x86 mm	684x86 mm
Anti-crushing	encoder and microprocessor	encoder and microprocessor
Manual cycle	reversible	reversible
Emergency operation	Back-up batteries	Manual op./Spring closing
Operating temperature	-10°/50°C	-10°/50°C

Bft, tuned to you

With Bft, your job gets easier.

Because we don't just create "good" products, that work pretty well.

Our thinking is beyond the short-term.

We are conceiving, designing and creating high-tech solutions that are as advanced and effective as they are reliable and long-lasting.

Because we want to provide tools and services that truly are innovative, that will improve your performance and enhance your skills; and that will make your business easier, increasing its profitability.

Because our focus is on Quality with a capital Q.

We just won't settle for less.

Bft Automation UK Ltd (North)

Units C2-C3 The Embankment Business Park
Vale Road, Heaton Mersey, Stockport, SK4 3GL
Tel: 0161 456 0456
Fax: 0161 456 9090

www.bft.co.uk

Bft Automation UK Ltd (South)

Unit B, Aerial Business Park
Membury, Berkshire, RG17 7RZ
Tel: 0800 32 88 198
Fax: 0800 32 88 298

www.bft.co.uk

Bft Ireland

Unit D3 City Link Business Park
Old Naas Road, Dublin 12
Tel: 01 4564711
Fax: 01 4508337

www.bftautomation.ie