








Be ahead

RANCH E



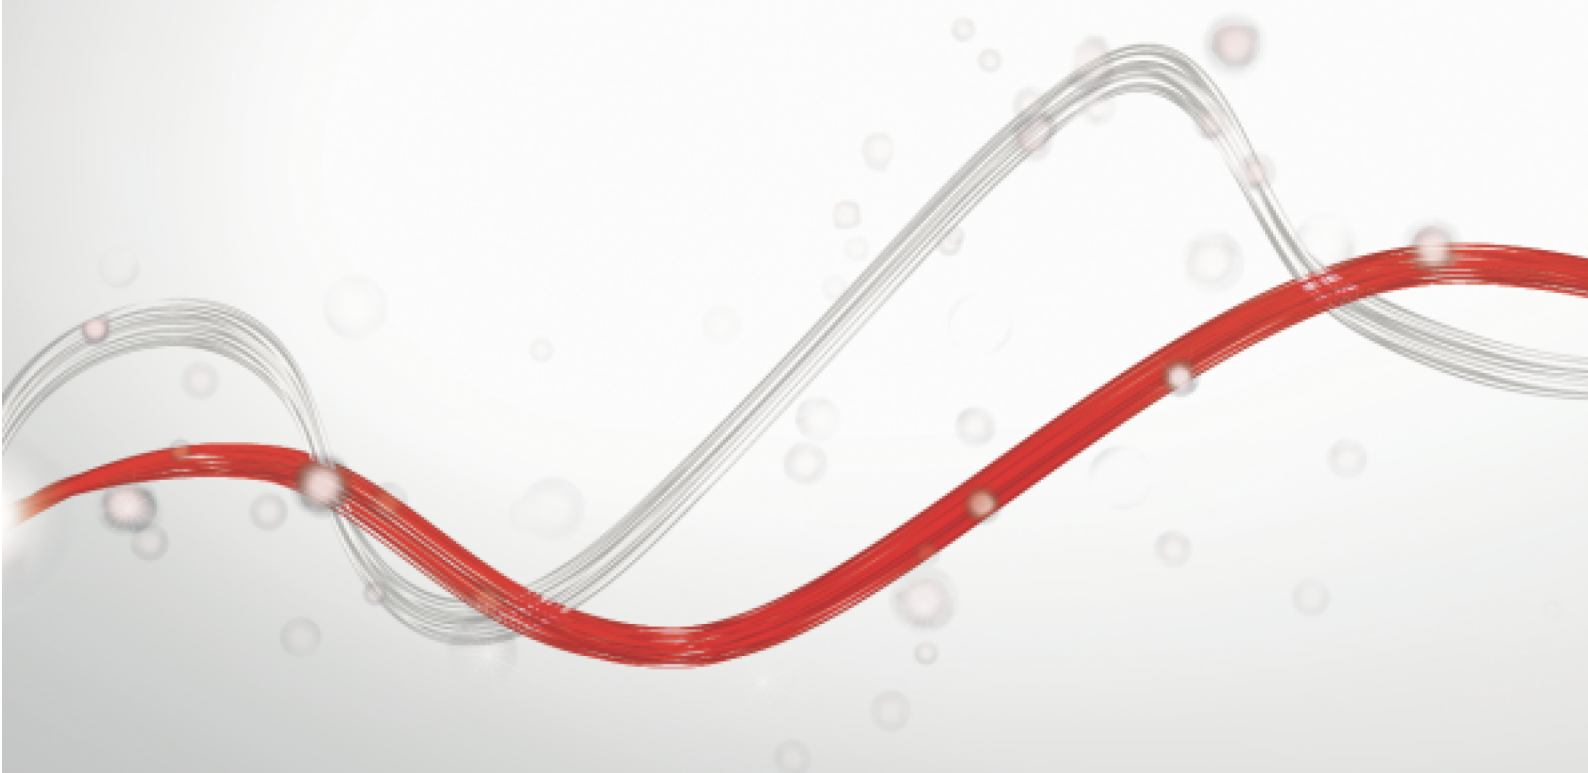

Anti-Terrorism bollards

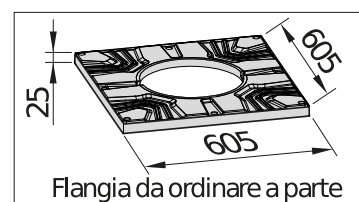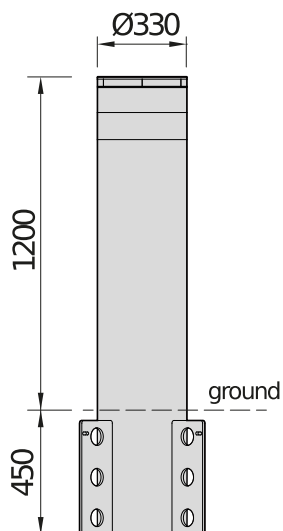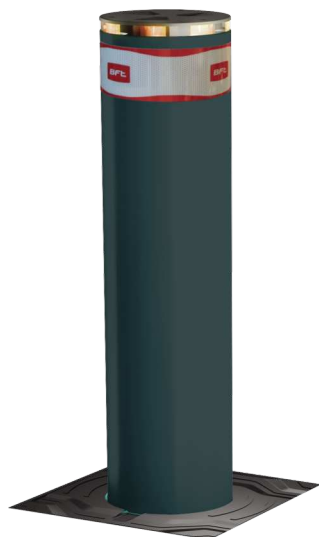

Fixed tall security bollard suitable for protection of sensitive sites. Reference standards IWA-14-1:2013 and PAS68:2010 with 7500/80/N3C rating, which includes ASTM2656:2007 M50. Double installation. High-strength structure based on the design of the automatic version XPA55 B 330/1200.



Anti-Terrorism bollards

RANCH E

Code	Ci	Name		Description
P970269 00103	2612952	RANCH E 330/1200C L RAL 7015 FIXED BOLLARD	new	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with cap without lights and RAL 7015 painted steel shaft. Flange not included. Cap with lights. Simulation as per standard IWA14-1:2013.
P970269 20103	2605619	RANCH E 330/1200C L RAL FIXED BOLLARD	new	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with painted stainless steel shaft. Flange not included. RAL colour as requested. Cap with lights. Simulation as per standard IWA14-1:2013.
P970269 00303	2612954	RANCH E 330/1200C LI STAINLESS STEEL 316	new	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with AISI 316L stainless steel shaft. Flange not included. Cap with lights and AISI 316L stainless steel version. Simulation as per standard IWA14-1:2013.

	RANCH E 330/1200C L RAL 7015 FIXED BOLLARD	RANCH E 330/1200C L RAL FIXED BOLLARD	RANCH E 330/1200C LI STAINLESS STEEL 316
Rod height	1200 mm	1200 mm	1200 mm
Rod diameter	330 mm	330 mm	330 mm
Rod thickness	14 mm	14 mm	14 mm
Impact resistance	350000 J (twin installation)	350000 J (twin installation)	350000 J (twin installation)
Break-in proof	2100000 J (twin installation)	2100000 J (twin installation)	2100000 J (twin installation)
Antiterrorism: reference standard	IWA14-1:2013 7500/80/N3C	IWA14-1:2013 7500/80/N3C	IWA14-1:2013 7500/80/N3C
Rod treatment	RAL 7015 cataphoresis coating and paint	Special RAL cataphoresis coating and paint	AISI 316L stainless steel

RECOMMENDED ACCESSORIES

	Cp P800119 - Ci 2605296 FLANGE RANCH E		Cp P975069 - Ci 2607224 ALLU K12
	Flange for Ranch E		Power supply for fixed Ranch E bollards



Anti-Terrorism bollards

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.





Anti-Terrorism bollards

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Anti-Terrorism bollards



U-LINK 2.0

AN UPDATED VERSION OF **U-LINK** TO GIVE YOU EVEN MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Anti-Terrorism bollards



A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.