




Be ahead



SMARTLIGHT COMMUNICATION POINT MASTER V2

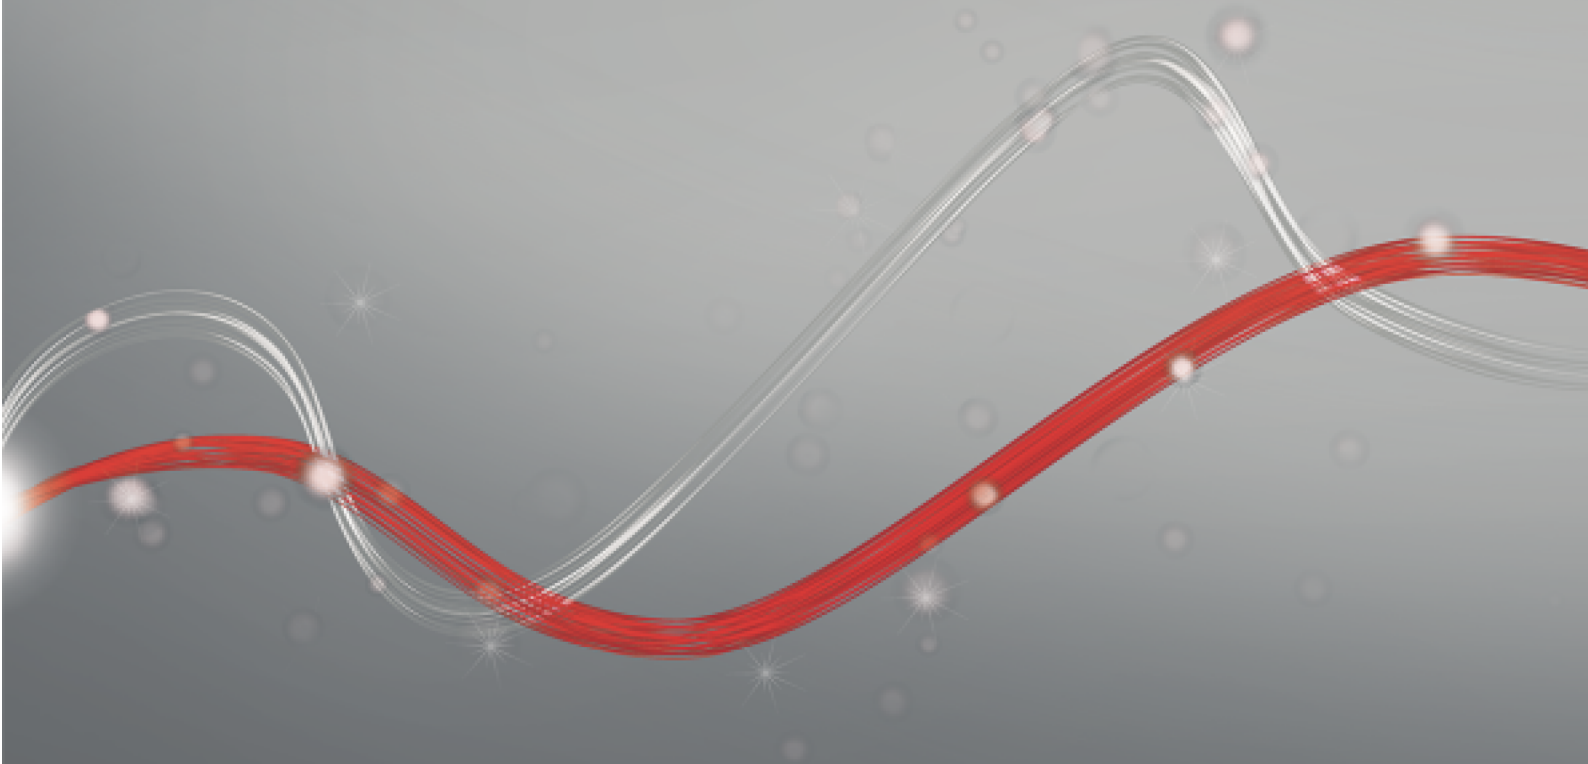




SMARTLIGHT COMMUNICATION POINT MASTER V2



SMARTLIGHT

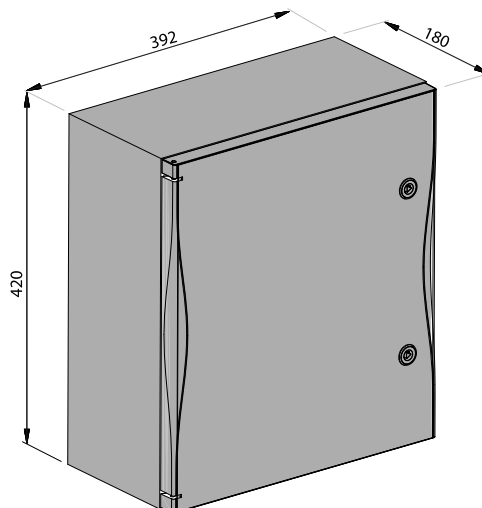

Centralizing control panel for PGS Smartlight.

Manages data collection of all connected devices (up to 96 sensors).

Complete with control unit, terminals, power supply and RS485/LAN communication device.

SMARTLIGHT COMMUNICATION POINT MASTER V2

Supply voltage	230 VAC \pm 10%
Protection rating	IP66 - IK10
Communication interface	RS485 - TCP/IP
Operating temperature	0 \div 50 °C

Code	Name	Supply voltage	Operating temperature	Sizes	Protection rating	Communication	Power consumption (zone controller)	Power consumption (96 sensors)	Power consumption (panels)
P208006M2	SMARTLIGHT COMMUNICATION POINT MASTER V2								



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.