



Be ahead



# ESPAS 30-I ULTRA






# ESPAS 30-I ULTRA



## ESPAS 30 ULTRA

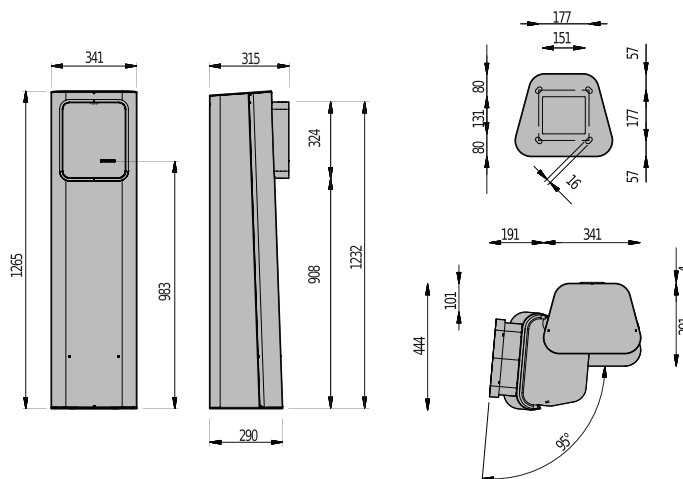

### ESPAS 30-I ULTRA

Materiaali



















Cabinet in 2,0 mm thick DD11 (UNI EN 10111) steel sheet;  
front panel in anti-wear and anti-scratch polycarbonate,

| Koodi         | Nimi                             |     |
|---------------|----------------------------------|-----|
| PA2D040R10000 | ESPAS 30-I ULTRA RF              |     |
| PA2D060R10000 | ESPAS 30-I ULTRA RF T            | new |
| PA2D040R11000 | ESPAS 30-I ULTRA RF CIT-BUS      |     |
| PA2D040R12000 | ESPAS 30-I ULTRA RF CIT-IP       |     |
| PA2D060R12000 | ESPAS 30-I ULTRA RF CIT-IP T     | new |
| PA2D160R12000 | ESPAS 30-I ULTRA SCN RF CIT-IP T | new |
| PA2D140R10000 | ESPAS 30-I ULTRA SCN RF          |     |
| PA2D140R11000 | ESPAS 30-I ULTRA SCN RF CIT-BUS  |     |
| PA2D140R12000 | ESPAS 30-I ULTRA SCN RF CIT-IP   |     |
| PA6D040R10000 | ESPAS 30-IH ULTRA RF             |     |
| PA6D040R11000 | ESPAS 30-IH ULTRA RF CIT-BUS     |     |
| PA6D140R12000 | ESPAS 30-IH ULTRA SCN RF CIT-IP  |     |



## ESPAS 30 ULTRA

### SUOSITELTAVAT LISÄVARUSTEET


|  |   |   |  |
|--|---|---|--|
|    | <b>Cp 21261 - Ci 2606001</b><br><b>KIT STATIONS ANCHOR BASE</b><br>Column anchor base for 20/30 entry/exit terminals  |    | <b>Cp D110945 - Ci 2607227</b><br><b>MAGNETIC LOOP 5MT</b><br>High sensivity pre-cabled magnetic loop (10m tail x 5m loop)   |
|    | <b>Cp D141784 - Ci 2607232</b><br><b>MAGNETIC LOOP 8MT</b><br>High sensivity pre-cabled magnetic loop (10m tail x 8m loop)  |    | <b>Cp D121711 - Ci 2605801</b><br><b>HEATER UNIT</b><br>Heater unit 60W for internal station/POF installation on DIN bar   |
|    | <b>Cp 385251 - Ci 2604460</b><br><b>TRAFFIC LIGHT 2 LED 100MM</b><br>Liikennevalo, jossa on kaksi kirkasta LED-valoa (punainen - vihreä) liikenteen säätämistä varten. Mukana LED-lamput. Halkaisija 100mm  |    | <b>new Cp P800174 - Ci 2451276</b><br><b>TRAFFIC LIGHT 2 LED 200MM</b><br>Two LED lights (red/green), high brightness racing-style traffic light system for controlling movements. With LED bulbs. Diameter 200mm.   |
|    | <b>Cp 385256 - Ci 2604461</b><br><b>TRAFFIC LIGHT 3 LED 100MM</b><br>Liikennevalo, jossa on kolme LED-valoa (punainen - punainen - vihreä), erittäin kirkas liikenteen säätämistä varten. Mukana LED-lamput. Diam. 100mm  |    | <b>Cp D413445 - Ci 2605793</b><br><b>TRUCK HEIGHT PEDESTAL 800MM</b><br>800mm height pedestal, with door, for entry/exit column  |
|   | <b>Cp D413530 - Ci 2605794</b><br><b>BUS HEIGHT PEDESTAL 600MM</b><br>600mm height pedestal, with door, for entry/exit column   |   | <b>Cp D113999 - Ci 2605754</b><br><b>LOOP DETECTOR LITE</b><br>2 channel loop detector, 24VDC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase   |
|  | <b>Cp D113948 - Ci 2605737</b><br><b>LOOP DETECTOR PRO</b><br>2 channel loop detector, 24VDC/AC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase. Direction detection.  |  | <b>Cp P800138 - Ci 2606835</b><br><b>KIT DENEBO TO DENEBO</b><br>Additional board used to communicate between two stations in "Two Ways" and "Double Height" configuration. For 30 system only.  |
|  | <b>Cp P800137 - Ci 2606776</b><br><b>KIT INTERLOCK FOR PARKING</b><br>Kit for manage interlock function (station between two barriers), useful to prevent queues on the gate or for particularly security requirements. It's usable when a third loop management is required (e.g. motorbike). Includes a loop detector for the second barrier safety loop and a kit of terminals in order to connect the commands of the second barrier. |  | <b>Cp 394080 - Ci 2607023</b><br><b>PRESENCE AND SAFETY DETECTOR - LASER LOOPS</b><br>Presence and Safety laser detector. Its used as an alternative of magnetic loops. Includes one input and two relay outputs. Maximum detection range: 9.9m x 9.9m. 10-35VDC power supply.   |
|  | <b>Cp 394073 - Ci 2604478</b><br><b>LASER SAFETY SENSOR</b><br>Safety laser detector. Its used in combination with magnetic loops in order to add an additional safety device (eg: for pedestrian). Includes two relay outputs. Maximum detection range: 5m x 5m. 10-35VDC power supply.  |  | <b>Cp 394071 - Ci 2604477</b><br><b>LBA FIXING BRACKET</b><br>Fixing bracket for LASER DETECTOR for ceiling or post mounted applications.  |
|  | <b>Cp 394075 - Ci 2607020</b><br><b>LASER DETECTOR REMOTE CONTROL</b><br>Remote control for settings Safety laser detector and Presence and Safety laser detector.  |  | <b>Cp P800132 - Ci 2606775</b><br><b>485-TCP/IP CONVERTER KIT</b><br>The device allows the insertion within a wired TCP/IP network of devices using an RS-485 serial interface. The solution is used in all those realities where it is necessary to transmit serial data through, for example, a local network already present. |



## ESPAS 30 ULTRA

### SUOSITELTAVAT LISÄVARUSTEET

|  |   |  |  |  |  |  |
|--|---|--|--|--|--|--|
|  | <b>Cp 394160 - Ci 2604482</b><br><b>PALO ø60 H3600</b>                                |  |  |  |  |  |
|  | Galvanized steel pole support for panels and traffic lights.<br>Diam. 60mm - h 3600mm |  |  |  |  |  |

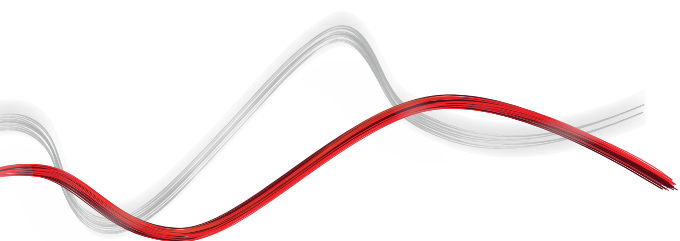



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.