



Be ahead



ESPAS 30-U ULTRA






ESPAS 30-U ULTRA



ESPAS 30 ULTRA

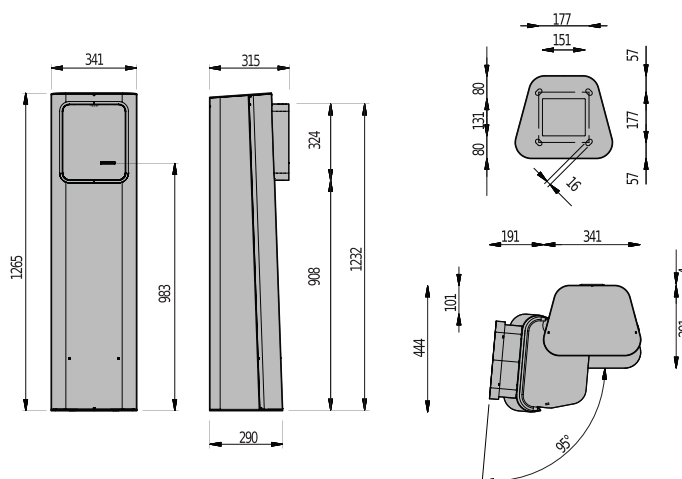

ESPAS 30-U ULTRA

Materiaali

Cabinet in 2,0 mm thick DD11 (UNI EN 10111) steel sheet;
front panel in anti-wear and anti-scratch polycarbonate,



















Koodi	Nimi
PA3D140R10000	ESPAS 30-U ULTRA SCN RF
PA3D160R10000	ESPAS 30-U ULTRA SCN RF T new
PA3D140R11000	ESPAS 30-U ULTRA SCN RF CIT-BUS
PA3D140R12000	ESPAS 30-U ULTRA SCN RF CIT-IP
PA3D160R12000	ESPAS 30-U ULTRA SCN RF CIT-IP T new
PA3D240R10000	ESPAS 30-U ULTRA PLUS RF
PA3D240R11000	ESPAS 30-U ULTRA PLUS RF CIT-BUS
PA3D240R12000	ESPAS 30-U ULTRA PLUS RF CIT-IP
PA3D260R12000	ESPAS 30-U ULTRA PLUS RF CIT-IP T new
PA7D140R10000	ESPAS 30-UH ULTRA SCN RF
PA7D140R11000	ESPAS 30-UH ULTRA SCN RF CIT-BUS



ESPAS 30 ULTRA

Koodi	Nimi
PA7D240R12000	ESPAS 30-UH ULTRA PLUS RF CIT-IP


SUOSITELTAVAT LISÄVARUSTEET

	Cp 21261 - Ci 2606001 KIT STATIONS ANCHOR BASE Column anchor base for 20/30 entry/exit terminals		Cp D110945 - Ci 2607227 MAGNETIC LOOP 5MT High sensivity pre-cabled magnetic loop (10m tail x 5m loop)
	Cp D141784 - Ci 2607232 MAGNETIC LOOP 8MT High sensivity pre-cabled magnetic loop (10m tail x 8m loop)		Cp D121711 - Ci 2605801 HEATER UNIT Heater unit 60W for internal station/POF installation on DIN bar
	Cp 385251 - Ci 2604460 TRAFFIC LIGHT 2 LED 100MM Liikennevalo, jossa on kaksi kirkasta LED-valoa (punainen - vihreä) liikenteen säätämistä varten. Mukana LED-lamput. Halkaisija 100mm		new Cp P800174 - Ci 2451276 TRAFFIC LIGHT 2 LED 200MM Two LED lights (red/green), high brightness racing-style traffic light system for controlling movements. With LED bulbs. Diameter 200mm.
	Cp 385256 - Ci 2604461 TRAFFIC LIGHT 3 LED 100MM Liikennevalo, jossa on kolme LED-valoa (punainen - punainen - vihreä), erittäin kirkas liikenteen säätämistä varten. Mukana LED-lamput. Diam. 100mm		Cp D413445 - Ci 2605793 TRUCK HEIGHT PEDESTAL 800MM 800mm height pedestal, with door, for entry/exit column
	Cp D413530 - Ci 2605794 BUS HEIGHT PEDESTAL 600MM 600mm height pedestal, with door, for entry/exit column		Cp D113999 - Ci 2605754 LOOP DETECTOR LITE 2 channel loop detector, 24VDC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase
	Cp D113948 - Ci 2605737 LOOP DETECTOR PRO 2 channel loop detector, 24VDC/AC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase. Direction detection.		Cp P800138 - Ci 2606835 KIT DENEBO TO DENEBO Additional board used to communicate between two stations in "Two Ways" and "Double Height" configuration. For 30 system only.
	Cp P800137 - Ci 2606776 KIT INTERLOCK FOR PARKING Kit for manage interlock function (station between two barriers), useful to prevent queues on the gate or for particularly security requirements. It's usable when a third loop management is required (e.g. motorbike). Includes a loop detector for the second barrier safety loop and a kit of terminals in order to connect the commands of the second barrier.		Cp 394080 - Ci 2607023 PRESENCE AND SAFETY DETECTOR - LASER LOOPS Presence and Safety laser detector. Its used as an alternative of magnetic loops. Includes one input and two relay outputs. Maximum detection range: 9.9m x 9.9m. 10-35VDC power supply.
	Cp 394073 - Ci 2604478 LASER SAFETY SENSOR Safety laser detector. Its used in combination with magnetic loops in order to add an additional safety device (eg: for pedestrian). Includes two relay outputs. Maximum detection range: 5m x 5m. 10-35VDC power supply.		Cp 394071 - Ci 2604477 LBA FIXING BRACKET Fixing bracket for LASER DETECTOR for ceiling or post mounted applications.
	Cp 394075 - Ci 2607020 LASER DETECTOR REMOTE CONTROL Remote control for settings Safety laser detector and Presence and Safety laser detector.		Cp 394160 - Ci 2604482 PALO ø60 H3600 Galvanized steel pole support for panels and traffic lights. Diam. 60mm - h 3600mm



ESPAS 30 ULTRA

SUOSITELTAVAT LISÄVARUSTEET

	Cp P800132 - Qi 2606775						
	485-TCP/IP CONVERTER KIT						
	The device allows the insertion within a wired TCP/IP network of devices using an RS-485 serial interface. The solution is used in all those realities where it is necessary to transmit serial data through, for example, a local network already present.						



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.