



Be ahead



VISTA SLA 200






VISTA SLA 200



Automation systems for automatic pedestrian doors

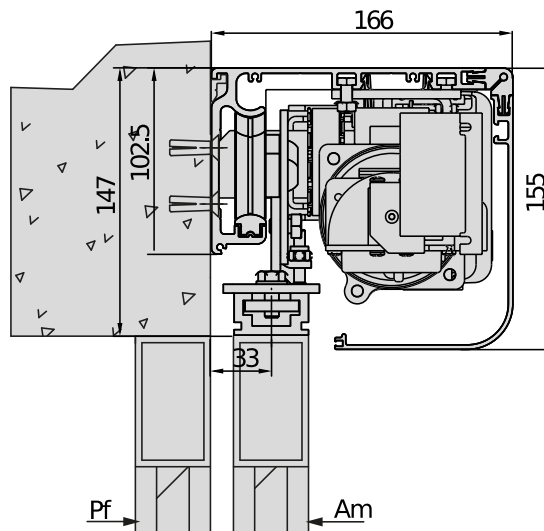

VISTA SL A200 SMART is the robust and highly reliable automation for heavyweight gates weighing up to 200 kg, to be combined with oversize profiles that offer complete stability of the gate.

VISTA SL A200 SMART is available in the automation kit version (MODULE KIT) to be used with the set of profiles and the belt and in the ASSEMBLED AUTOMATION version, to be ordered in the required size.



Automation systems for automatic pedestrian doors

VISTA SLA 200

Code	Ci	Name		Description
P960695 00002	2613405	VISTA SL A200 SMART-114		Automation for pedestrian door 1 with door of max. weight 200 kg. Clear opening range 750 ÷ 2150 mm. Beam length 1600÷3000 mm. Aluminium anodised cover cut to size and supplied. Oversized profiles, maximum performance. Dunker motor.
P960696 00002	2613406	VISTA SL A200 SMART-121		Automation for pedestrian door 1 with door of max. weight 200 kg. Clear opening range 750 ÷ 2150 mm. Beam length 3001÷4400 mm. Aluminium anodised cover cut to size and supplied. Oversized profiles, maximum performance. Dunker motor.
P960697 00002	2613407	VISTA SL A200 SMART-214		Automation for pedestrian door 2 with door of max. weight 150+150 kg. Clear opening range 800 ÷ 2900 mm. Beam length 1900÷3000 mm. Aluminium anodised cover cut to size and supplied. Oversized profiles, maximum performance. Dunker motor.
P960698 00002	2613408	VISTA SL A200 SMART-221		Automation for pedestrian door 2 with door of max. weight 150+150 kg. Clear opening range 800 ÷ 2900 mm. Beam length 3001÷4400 mm. Aluminium anodised cover cut to size and supplied. Oversized profiles, maximum performance. Dunker motor.
P960699 00002	2613409	VISTA SL A200 SMART-229		Automation for pedestrian door 2 with door of max. weight 150+150 kg. Clear opening range 800 ÷ 2900 mm. Beam length 4401÷6000 mm. Aluminium anodised cover cut to size and supplied. Oversized profiles, maximum performance. Dunker motor.

	VISTA SL A200 SMART-1	VISTA SL A200 SMART-2
Leaf type	Sliding	Sliding
Number of gate panels	1	2
Max Leaf	200 kg	150+150 kg
Max automation dimensions	166 x 155 x 6000 mm	166 x 155 x 6000 mm
Clear opening	750 ÷ 2150 mm	800 ÷ 2900 mm
Opening/closing speed per leaf (max)	Adjustable up to 1 m/s	Adjustable up to 1 m/s
Approach speed per leaf (max)	5 ÷ 10 cm/s	5 ÷ 10 cm/s
Control unit	ARIA EVO	ARIA EVO
Motor voltage	24 V	24 V
Motor type	Dunker	Dunker
Nominal power	300 W	300 W
Frequency of use	Continuous	Continuous
Impact reaction	Electronic torque limiter	Electronic torque limiter
Type of limit switch	Encoder + mechanical stop for opening	Encoder + mechanical stop for opening
Manual cycle	Reversible	Reversible
Locking	Mechanical	Mechanical
Release	Release lever	Release lever
Operating temperature	-20 ÷ 55 °C	-20 ÷ 55 °C
Protection rating	IPX0	IPX0



Automation systems for automatic pedestrian doors











RECOMMENDED ACCESSORIES

	Cp P111768 - Ci 2607186 BBV BATT MODULO VISTA SL		Cp P111680 - Ci 2611329 WMP SL SLC
	Set of backup batteries for VISTA SL		Contains 2 crossbeam support profiles of length L = 1 m each
	Cp N733408 - Ci 2605036 ERV		Cp P111445 - Ci 2605122 SBV
	Electric lock for VISTA SL, SL C, TL (use in conjunction with BBV recommended)		Anodised aluminium supporting crosspiece for VISTA SL
	Cp P111681 - Ci 2611330 PRV AA SL		Cp P111156 - Ci 2605044 PPR
	Leaf attachment profile for Vista SL.		Door guide slide for automatic doors with aluminium frame
	Cp P111158 - Ci 2605045 PGL		Cp D113722 - Ci 2600305 VISTA SEL
	Bottom door guide for automatic doors with aluminium frame		Function selector for pedestrian door series VISTA SL, SL C, TL
	Cp P111720 00002 - Ci 2611347 SASA 1AM SIST SFOND.1 ANTA MOBILE		Cp P111721 00002 - Ci 2611348 SASA 1AMF SIST SFOND.ANTE 1 MOB + 1 FX
	Breakthrough system kit for 1 movable leaf		Breakthrough system kit for 1 fixed leaf and 1 movable leaf
	Cp P111722 00002 - Ci 2611349 SASA 2AM SIST SFOND...2 ANTE MOB		Cp P111723 00002 - Ci 2611350 SASA 2AMF SIST SFOND.ANTE 2 MOB + 2 FX
	Breakthrough system kit for 2 movable leaves		Breakthrough system kit for 2 fixed leaves and 2 movable leaves
	Cp P111724 00002 - Ci 2611351 SASA BRACKETS FOR LEAF BREAKAGE DETECTION PHOTOC.		Cp P111725 00002 - Ci 2611352 SASA PRA 2,5 PROF.PROT.ANTE FX/MOB 2.5M
	Bracket kit for mounting FPA1 photocells for leaf breakage detection		Protection profile for fixed/movable leaf. Length L = 2,5 m
	Cp P111726 00002 - Ci 2613113 SASA PRA 5 PROF. PROTEZ.ANTE FX/MOB, 5M		Cp P111607 00002 - Ci 2613082 PRV 40.080 CORNICE ABBATTIMENTO L=6.82
	Protection profile for fixed/movable leaf. Length L = 5 m		Break-open frame for fixed leaf joint. Length L = 6,82 m
	Cp P111610 00002 - Ci 2613083 PRV 40.120 MONTANTE ABBATTIMENTO L=5.1		Cp N733589 - Ci 2613262 PRV 40.A53 CERNIERE PER SASA DX
	Break-open upright for fixed leaf joint. Length L = 5,1 m		Right hinge for joint on fixed leaf
	Cp N733590 - Ci 2613263 PRV 40.A54 CERNIERE PER SASA SX		Cp P111753 - Ci 2611356 OA-AXIS T
	Left hinge for joint on fixed leaf		Active infrared sensor for activation and security with safety test
	Cp P111751 - Ci 2600816 OA-AXIS II		Cp P111754 - Ci 2611357 OA-203C
	Active infrared sensor for activation and security		Active infrared sensor for activation and presence
	Cp P111755 - Ci 2611358 OA-PRESENCE TN		Cp P111759 - Ci 2611361 OT 3
	Active infrared sensor for security		Elbow-operated pushbutton, silver



Automation systems for automatic pedestrian doors

RECOMMENDED ACCESSORIES

	Cp P111653 - Ci 2611314 VIO-DT2 Safety and bi-directional activation sensor, dual technology, monitored		Cp P111654 - Ci 2611315 VIO-DT1 Safety and mono-directional activation sensor, dual technology, monitored
	Cp P111655 - Ci 2611316 IXIO-DT1 Safety and mono-directional activation sensor, dual technology, monitored, programmable c.telecom.		Cp P111656 - Ci 2611317 VIO-ST Infrared safety sensor, monitored
	Cp P111662 - Ci 2611321 VIO-M Compact mono-directional activation sensor		Cp P111676 - Ci 2611326 MAGIC SWITCH Activation touch button
	Cp P111677 - Ci 2611327 PUSH PLATE Activation button		Cp P111678 - Ci 2611328 SPAC Pair of locks (2) for glass leaf
	Cp P111687 - Ci 2613100 KIT FPA MA-I2 FPA MA 12 kit with two pairs photocells and brackets for Vista		Cp P111685 - Ci 2605163 KIT FPA2 FPA kit with two pairs photocells and brackets for Vista
	Cp P111683 - Ci 2605162 KIT FPA1 FPA kit with pair of photocells and brackets for Vista		



Automation systems for automatic pedestrian doors

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.





Automation systems for automatic pedestrian doors

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Automation systems for automatic pedestrian doors



U-LINK 2.0

AN UPDATED VERSION OF
U-LINK TO GIVE YOU EVEN
MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Automation systems for automatic pedestrian doors

-SECURITY

A NEW AND EVEN MORE SECURE **RADIO PROTOCOL**



➤ **Secure**

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



➤ **Easy**

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app



➤ **Universal**

The radio protocol is also compatible with the previous generation of receivers

