



Be ahead



BOTTICELLI / EOS120






Automation systems for garage doors



Empowered by
U-LINK

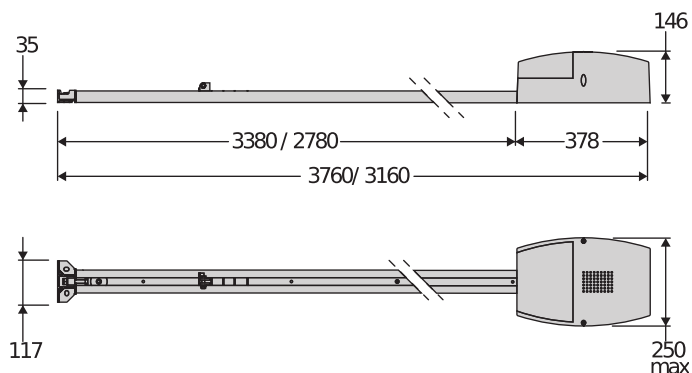

Electromechanical operators for intensive/very intensive use, designed for the automation of sectional garage doors. Suitable for installation in any context, thanks to the wide choice of chain rails available in the various lengths. The control unit and limit switch with encoder with mechanical stop are incorporated in the operator and rail respectively.

Relevant features




Built-in control unit with automatic learning of opening and closing force.



High-strength galvanised steel rail with ducts to facilitate the routing of the cables.



Encoder and exclusive D-Track force management system for safe installations in all conditions.

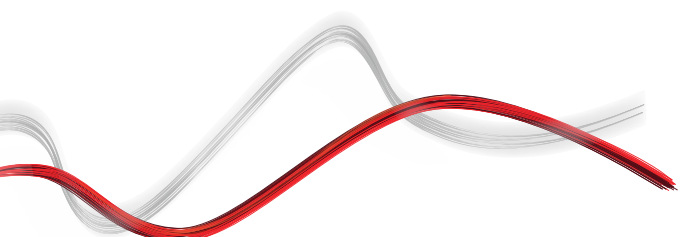



Automation systems for garage doors



BOTTICELLI / EOS120

Code	Ci	Name	Description
R935013 70001	R935013 70001	BOTTICELLI KIT CHAIN 2.9	Kit complet 24 V portes de garage sectionnelles avec force de traction 60 kg et utilisation Intensif. Surface de la porte 10 m ² . Vitesse d'ouverture 5 m/min. Rail 2900 mm à chaîne. D-Track
R935014 70001	R935014 70001	BOTTICELLI KIT BELT 2.9	Kit complet 24 V portes de garage sectionnelles avec force de traction 60 kg et utilisation Intensif. Surface de la porte 10 m ² . Vitesse d'ouverture 5 m/min. Rail 2900 mm à courroie. D-Track
R935015 70001	R935015 70001	BOTTICELLI KIT CHAIN 3.5	Kit complet 24 V portes de garage sectionnelles avec force de traction 60 kg et utilisation Intensif. Surface de la porte 10 m ² . Vitesse d'ouverture 5 m/min. Rail 3500 mm à chaîne. D-Track
R935016 70001	R935016 70001	BOTTICELLI KIT BELT 3.5	Kit complet 24 V portes de garage sectionnelles avec force de traction 60 kg et utilisation Intensif. Surface de la porte 10 m ² . Vitesse d'ouverture 5 m/min. Rail 3500 mm à courroie. D-Track

RECOMMENDED ACCESSORIES

	Cp N733391 - Ci 2600788 PBE Complete kit for extending the useful travel of the BOTTICELLI and EOS 120 chain rails by 1 m.		Cp N999060 - Ci 2611068 APT Assembly for fitting BOTTICELLI, EOS 120 at over 30 cm from the ceiling
	Cp N733069 - Ci 2600786 SET/S External release for insulated sectional and overhead doors of thickness up to 50 mm.		Cp P115029 - Ci 2611390 BRTS Triangular slide arm for overhead doors For BOTTICELLI SMART BT A 850-1250, BOTTICELLI B CRC 480, EOS 120, BOTTICELLI 800 U and EOS 120 U operators.



Automation systems for garage doors

EasyAXS

EASY CONNECT. EASY ACCESS.

Empowered by
U-LINK

The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.

1

EASY TO CONNECT



PLUG&PLAY
CONNECTIVITY MODULE
FOR QUICKLY CONNECTING
BFT SOLUTIONS



2

EASY TO SET UP



CONFIGURATION
AND
MANAGEMENT OF
THE MOTOR WITH
THE **EasyAXS app**

3

EASY TO CONTROL



TaHoma app
TO PROVIDE CUSTOMERS
WITH A SMART SOLUTION
FOR ACCESSING THEIR
HOMES





Automation systems for garage doors



EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Automation systems for garage doors

Empowered by
U-LINK

U-LINK 2.0

AN UPDATED VERSION OF
U-LINK TO GIVE YOU EVEN
MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Automation systems for garage doors

Empowered by
U-LINK

U-SECURITY

A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers

