






Be ahead

RANCH C






Parking and traffic bollards

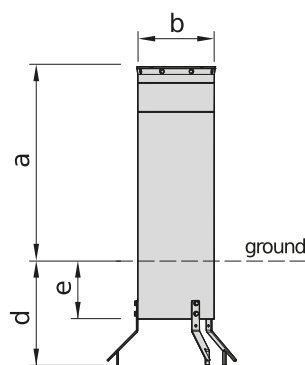

	a	b	c	d	e	f	g	h
RANCH C 275/600CN L	600	Ø273	Ø500	360	198	470	470	25
RANCH C 275/800CN L	800	Ø273	Ø500	360	198	470	470	25

Fixed bollard, diameter 273 mm, used for long-term access prevention. Can be combined with automatic or semi-automatic bollards.

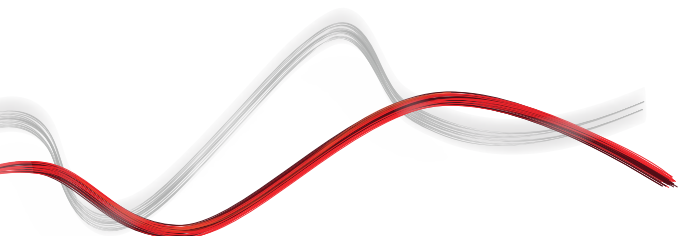



Parking and traffic bollards

RANCH C

Code	Ci	Name	Description
P970102 00101	2613169	RANCH C 275/600CN - RAL	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version without lights and painted steel shaft. RAL colour to order. Flange not included. High breakage resistance.
P970102 00002	2605601	RANCH C 275/600CN L	Fixed bollard used for preventing access for long periods. Height 600 mm and diameter 273 mm. Version with lights and shaft in RAL 7015 painted steel. Flange not included. High breakage resistance.
P970102 00003	2605602	RANCH C 275/600CN I	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version without lights and AISI 304 stainless steel shaft. Flange not included. High breakage resistance.
P970102 00304	2613171	RANCH C 275/600CN LI STAINLESS STEEL 316	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version with lights and AISI 316L stainless steel shaft. Flange not included. High breakage resistance.
P970103 00002	2605603	RANCH C 275/800CN L	Fixed bollard used for preventing access for long periods. Height 800 mm and diameter 273 mm. Version with lights and shaft in RAL 7015 painted steel. Flange not included. High breakage resistance.
P970103 00304	2605605	RANCH C 275/800CN LI STAINLESS STEEL 316	Fixed bollard used for long-term access prevention. Height 800 mm and diameter 273 mm. Version with lights and AISI 316L stainless steel shaft. Flange not included. High breakage resistance.

	RANCH C 275/600CN - RAL	RANCH C 275/600CN L	RANCH C 275/600CN I
Rod height	600 mm	600 mm	600 mm
Rod diameter	273 mm	273 mm	273 mm
Rod thickness	6 mm	6 mm	6 mm
Impact resistance	20000 J	20000 J	20000 J
Break-in proof	250000 J	250000 J	250000 J
Rod treatment	Special RAL cataphoresis coating and paint	RAL 7015 cataphoresis coating and paint	AISI 304 stainless steel

	RANCH C 275/600CN LI STAINLESS STEEL 316	RANCH C 275/800CN L	RANCH C 275/800CN LI STAINLESS STEEL 316
Rod height	600 mm	800 mm	800 mm
Rod diameter	273 mm	273 mm	273 mm
Rod thickness	6 mm	6 mm	6 mm
Impact resistance	20000 J	20000 J	20000 J
Break-in proof	250000 J	250000 J	250000 J
Rod treatment	AISI 316L stainless steel	RAL 7015 cataphoresis coating and paint	AISI 316L stainless steel

RECOMMENDED ACCESSORIES

	Cp P800104 - Ci 2607208 ALLU		Cp P800109 - Ci 2605287 FLANGE RANCH C
	Power supply for fixed bollards.		Flange for Ranch C



Parking and traffic bollards

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.

1

EASY TO CONNECT



PLUG&PLAY
CONNECTIVITY MODULE
FOR QUICKLY CONNECTING
BFT SOLUTIONS



2

EASY TO SET UP



CONFIGURATION
AND
MANAGEMENT OF
THE MOTOR WITH
THE **EasyAXS app**

3

EASY TO CONTROL



TaHoma app
TO PROVIDE CUSTOMERS
WITH A SMART SOLUTION
FOR ACCESSING THEIR
HOMES





Parking and traffic bollards

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

**WIFI MODULE
+ ANTENNA**



→ 20/25 metres

**MOBILE MODULE
+ ANTENNA + SIM**



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Parking and traffic bollards



U-LINK 2.0

AN UPDATED VERSION OF **U-LINK** TO GIVE YOU EVEN MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Parking and traffic bollards



A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app



Universal

The radio protocol is also compatible with the previous generation of receivers



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.