


Complete range of semi-automatic bollards operated by gas spring. They allow road access control at convenient prices and extremely easy operation. Also available with s/steel shaft and luminous cap.

## DIMENSION (MM)

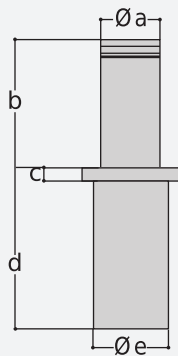

	a	b	c	d	e
<b>DAMPY B 115-500 / DAMPY B 115-500 INOX</b>	115	500	25	593	168
<b>DAMPY B 210-500 / DAMPY B 210-500 INOX</b>	210	500	45	756	273
<b>DAMPY B 210-700 / DAMPY B 210-700 INOX</b>	210	700	45	1016	273

## TECHNICAL FEATURES


	DAMPY B 219/700	DAMPY B 219/700 I	DAMPY B 219/700 L	DAMPY B 219/700 LI
Rod height	700 mm	700 mm	700 mm	700 mm
Rod thickness	6 mm	6 mm	6 mm	6 mm
Rod diameter	220 mm	220 mm	220 mm	220 mm
Rod movement	Internal gas spring	Internal gas spring	Internal gas spring	Internal gas spring
Impact resistance	10000 J	10000 J	10000 J	10000 J
Break-in proof	60000 J	60000 J	60000 J	60000 J
Rod locking	With triangle key	With triangle key	With triangle key	With triangle key



		Description
<b>P970083 00001</b>	<b>DAMPY B 115/500</b>	Semi-automatic bollard with gas spring, with shaft diameter 115 mm and height 500 mm. Impact resistance 5000 J. Foundation box included. Cataphoresis.
<b>P970083 00002</b>	<b>DAMPY B 115/500 I</b>	Semi-automatic bollard with gas spring with shaft diameter 115 mm and height 500 mm. Impact resistance 5000 J. Stainless steel version. Foundation box included. Stainless steel.
<b>P970084 00001</b>	<b>DAMPY B 219/500</b>	Semi-automatic bollard with gas spring, with shaft diameter 220 mm and height 500 mm. Impact resistance 10000 J. Foundation box included. Cataphoresis.
<b>P970084 00002</b>	<b>DAMPY B 219/500 I</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 500 mm. Impact resistance 10000 J. Stainless steel version. Foundation box included. Stainless steel.
<b>P970085 00001</b>	<b>DAMPY B 219/500 L</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 500 mm. Impact resistance 10000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Lights.
<b>P970085 00002</b>	<b>DAMPY B 219/500 LI</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 500 mm. Impact resistance 10000 J. Stainless steel version with LED light cap. Foundation box included. Lights and s/steel.
<b>P970086 00001</b>	<b>DAMPY B 219/700</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 700 mm. Impact resistance 10000 J. RAL 7015 painted steel version. Cataphoresis.
<b>P970086 00002</b>	<b>DAMPY B 219/700 I</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 700 mm. Impact resistance 10000 J. Stainless steel version. Foundation box included. Stainless steel.
<b>P970087 00001</b>	<b>DAMPY B 219/700 L</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 700 mm. Impact resistance 10000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Lights.
<b>P970087 00002</b>	<b>DAMPY B 219/700 LI</b>	Semi-automatic bollard with gas spring with shaft diameter 220 mm and height 700 mm. Impact resistance 10000 J. Stainless steel version with LED light cap. Foundation box included. Lights and s/steel.

## RECOMMENDED ACCESSORIES

	<b>P800104 - ALLU</b>			
	Power supply for Gas and Fixed Bollards with Lights 24 Vac (up to 80 bollards).			

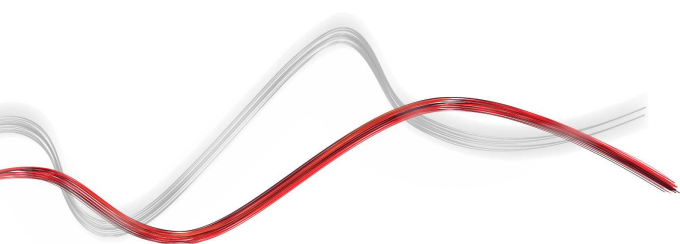

[www.bft-automation.com](http://www.bft-automation.com)