




Be ahead

RANCH E





Anti-Terrorism bollards

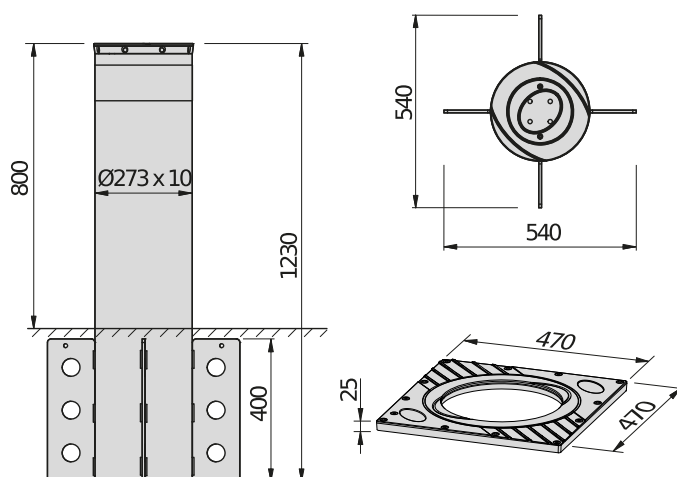

High security fixed anti-terrorism bollard, certified in accordance with standard IWA14-1:2013 and PAS 68. High-strength structure based on the design of the automatic version XPASS 330/1200.



Anti-Terrorism bollards

RANCH E

Code	Name		Description
P970269 00003	RANCH E 330/1200C LI		Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with stainless steel AISI 304 shaft. Flange not included Cap with lights. Simulation as per standard IWA14-1:2013.
P970269 00303	RANCH E 330/1200C LI STAINLESS STEEL 316		Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with AISI 316L stainless steel shaft. Flange not included. Cap with lights and AISI 316L stainless steel version. Simulation as per standard IWA14-1:2013.
P970269 20103	RANCH E 330/1200C L RAL FIXED BOLLARD		Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with painted stainless steel shaft. Flange not included. RAL colour as requested. Cap with lights. Simulation as per standard IWA14-1:2013.
P970269 00103	RANCH E 330/1200C L RAL 7015 FIXED BOLLARD		Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with cap without lights and RAL 7015 painted steel shaft. Flange not included Cap with lights. Simulation as per standard IWA14-1:2013.

	RANCH E 330/1200C LI	RANCH E 330/1200C LI STAINLESS STEEL 316	RANCH E 330/1200C L RAL FIXED BOLLARD	RANCH E 330/1200C L RAL 7015 FIXED BOLLARD
Operator type	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards
Rod height	1200 mm	1200 mm	1200 mm	1200 mm
Rod thickness	14 mm	14 mm	14 mm	14 mm
Rod diameter	330 mm	330 mm	330 mm	330 mm
Rod treatment	AISI 304 stainless steel	AISI 316L stainless steel	Special RAL cataphoresis coating and paint	RAL 7015 cataphoresis coating and paint
Break-in proof	2100000 J	2100000 J	2100000 J	2100000 J

RECOMMENDED ACCESSORIES

	P800119 - FLANGE RANCH E		P975069 - ALLU K12
	Flange for Ranch E		Power supply for fixed Ranch E bollards



Anti-Terrorism bollards

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems.

In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Anti-Terrorism bollards

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

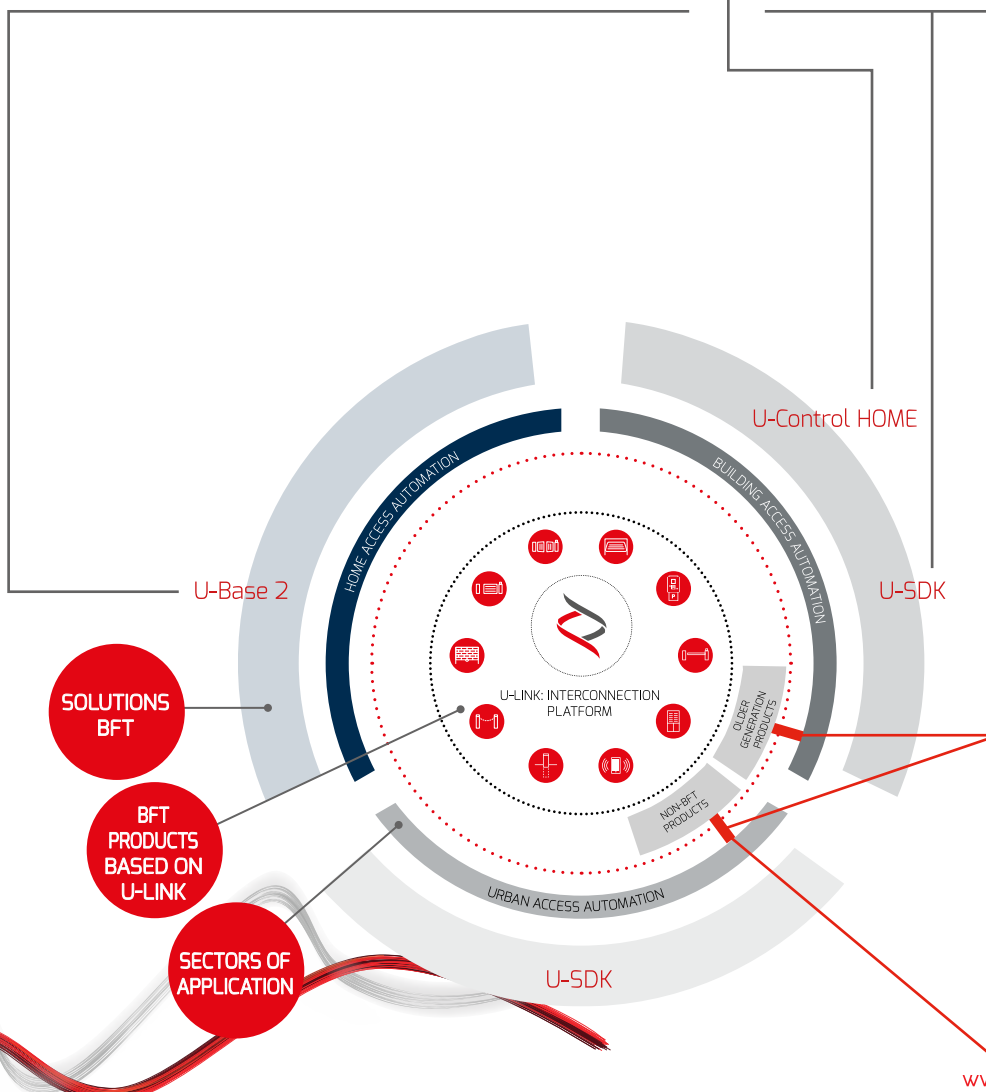



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.