




Be ahead



E5 BT A

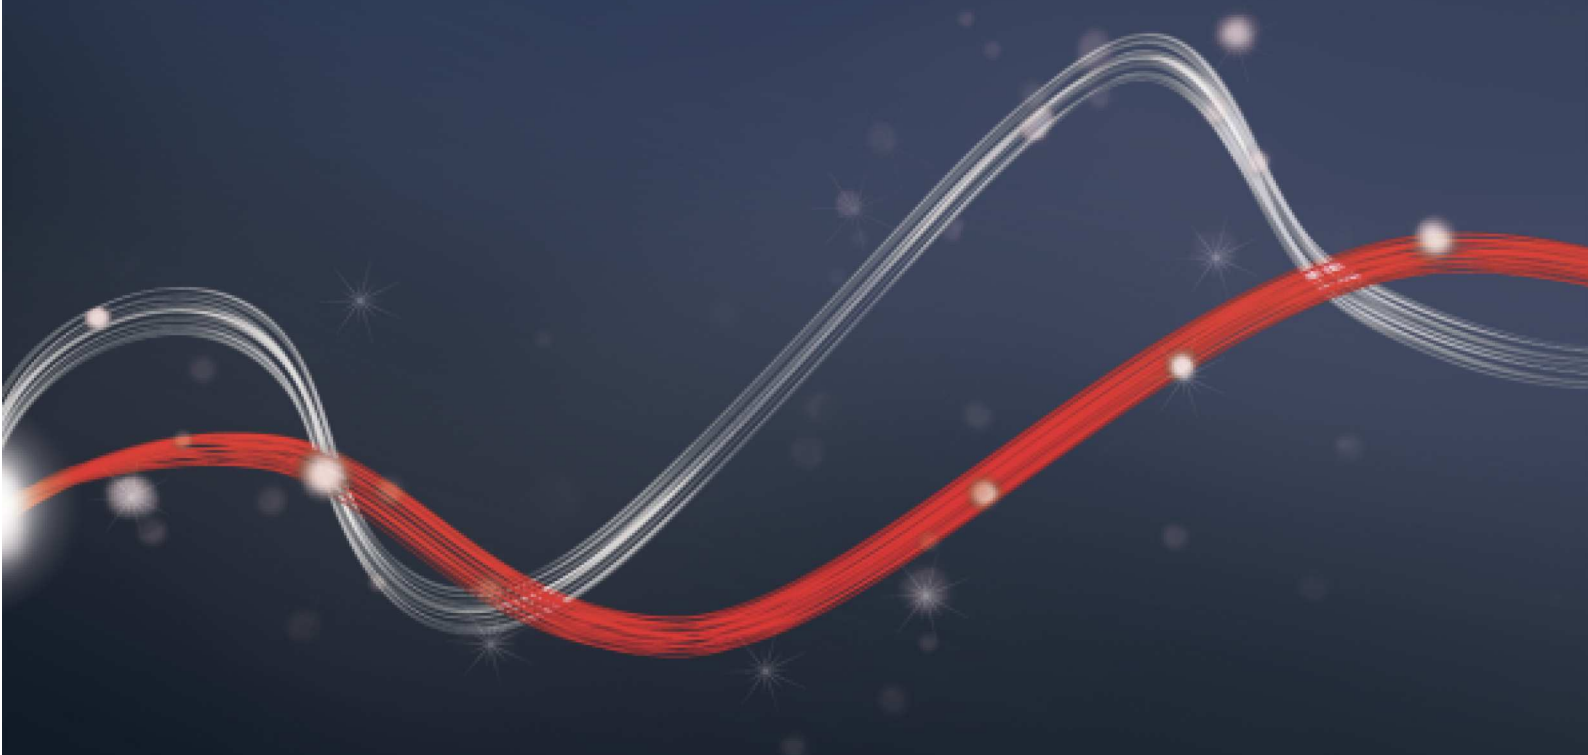




E5 BT A



Electromechanical automation systems for swing gates



Empowered by
U-LINK

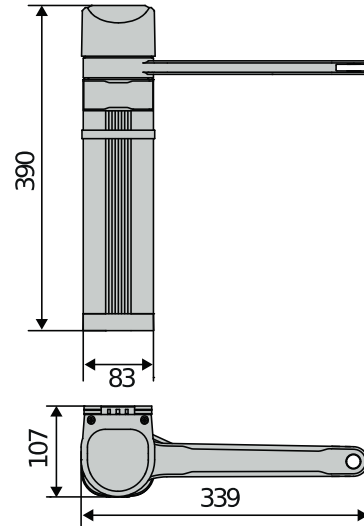

24V reversible electromechanical operator for swing gates for pedestrian and vehicular access, for use in homes and apartment buildings. Its small size means it can be installed on small pillars and columns (minimum width required 8cm). The slide arm option means constraints such as walls and obstacles close to the operator can be overcome. The limit switch function is regulated by the absolute encoder. The safety of the operator is guaranteed thanks to the D-track system which precisely determines the position and force with which the gate moves, using the friction inside the operator and the new articulated and slide arms with anti-shear design.

Relevant features



U-LINK

U-Link platform: Using the Thalia control unit, the E5 BT A operator is compatible with the U-Link communication protocol, the exclusive Bft connectivity platform.



d-track

D-Track dynamic path tracking: smart torque management system that constantly updates the gate torque level, improving the safety of the maneuver regardless of weather conditions, temperature or the degree of wear of the system.



Absolute Encoder: absolute encoder means that the E5 BT A recognises the position of the gate at any time, managing the slow down phase during opening and closing with absolute precision.



Easy Assembly

Ease of installation: the fixing bracket on the column or pillar provides simpler installation. The Thalia control unit has standardised colour terminal blocks which simplifies the identification of the outputs / inputs. The removable terminal blocks facilitate the wiring process. Extremely easy to set the closing and opening limit switches.



Electromechanical automation systems for swing gates



Relevant features



6,5 sec

Speed: The E5 BT A12 takes only 4.5 to 6.5 seconds (90 ° manoeuvre including slowdown) to open, based on the weight and dimensions of the leaf.



push&go

Push&Go: When activated, the Push & Go function allows the gate to open completely when manually pushed.



Multi-resident or commercial sites: The E5 BT A12 is ideal for apartment block installations or public buildings, with features such as remote opening from inside the building and the ability to set the gate to close automatically after opening, preventing it being left open.



Electromechanical automation systems for swing gates

Empowered by
U-LINK

E5 BT A

Code	Ci	Name	Description	
P930027 00003	2601403	E5 BT A12	Reversible compact pedestrian electromechanical operator of small size that can be installed on pillars or columns only 80mm wide Application for pedestrian gates up to 1.2m wide and up to 80kg in weight Closes in 6.5s (ideal installation conditions) Operator with primary lever, to which the articulated arm or the short slide lever are added (accessories) Absolute encoder limit switch	 U-Link
P930027 00001	2601404	E5 BT A18	Reversible compact vehicular electromechanical operator of small size that can be installed on pillars or columns only 80mm wide Application for vehicle gates up to 1.8m wide and up to 100kg in weight Operator with primary lever, to which the articulated arm or the long slide lever are added (accessories) Absolute encoder limit switch	 U-Link

	E5 BT A12	E5 BT A18
Control unit	THALIA BT A80, THALIA	THALIA BT A80, THALIA
Board power supply	230 V	230 V
Motor voltage	24 V	24 V
Max. weight of door/gate wing	80 kg	100 kg
Power consumption	100 W	100 W
Max. width of door/gate wing	1,2 m	1,8 m
Cycle time	6,5 s	14 s
Type of limit switch	Absolute encoder	Absolute encoder
Release	Reversible	Reversible
Impact reaction	D-Track	D-Track
Frequency of use	very intensive	Semi intensive
Frequency of use	100 Cicli/ora	20 Cicli/ora
Degree of protection (IP)	IP44	IP44
Environmental conditions	-20 ÷ 55 °C	-20 ÷ 55 °C

VITAL ACCESSORIES

	  Cp D113745 00002 - Ci 2600477 THALIA		 Cp D113747 00002 - Ci 2600583 THALIA P
	Control panel with display for one or two 24V electromechanical operators for swing gates		Control panel for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for highly complex systems
	Cp N734921 - Ci 2601405 LBA		Cp N735057 - Ci 2601406 LS12
	Lever for articulated arm, E5 BT A12, E5 BT A18		Short pedestrian slide lever for E5 BT A12



Electromechanical automation systems for swing gates




VITAL ACCESSORIES

	Cp N735058 - Ci 2601407 L518				
	Long slide lever for E5 BT A18				

RECOMMENDED ACCESSORIES

	Cp D114168 00003 - Ci 2607544 RADIUS LED BT A R1 W		Cp P111782 - Ci 2601411 COMPACTA A20-180
	Flashing light with incorporated antenna for motors with 24 V power supply. White flashing light.		Pair of photocells adjustable 180° horizontally. 20 metre range. 12-33 VAC/15-35 VDC power supply.
	Cp P125020 - Ci 2600844 BBT BAT		new Cp P123032 00003 - Ci 2613518 EBP BT A 24V
	Set of backup batteries for THALIA, THALIA P, ZARA and PHEBE		24V vertical electric lock.

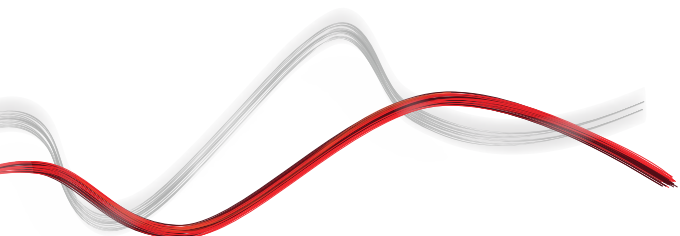



E5 BT A

HOME
ACCESS AUTOMATION

Electromechanical automation systems for swing gates

EasyAXS

EASY CONNECT. EASY ACCESS.



Empowered by
U-LINK



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.

1

EASY TO CONNECT



PLUG&PLAY
CONNECTIVITY MODULE
FOR QUICKLY CONNECTING
BFT SOLUTIONS



2

EASY TO SET UP



CONFIGURATION
AND
MANAGEMENT OF
THE MOTOR WITH
THE **EasyAXS app**

3

EASY TO CONTROL



TaHoma app
TO PROVIDE CUSTOMERS
WITH A SMART SOLUTION
FOR ACCESSING THEIR
HOMES





E5 BT A

HOME
ACCESS AUTOMATION

Electromechanical automation systems for swing gates



EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Electromechanical automation systems for swing gates



Empowered by
U-LINK



U-LINK 2.0

AN UPDATED VERSION OF
U-LINK TO GIVE YOU EVEN
MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Electromechanical automation systems for swing gates



Empowered by
U-LINK

U-SECURITY

A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers

