




Be ahead



# SMARTLIGHT VMS


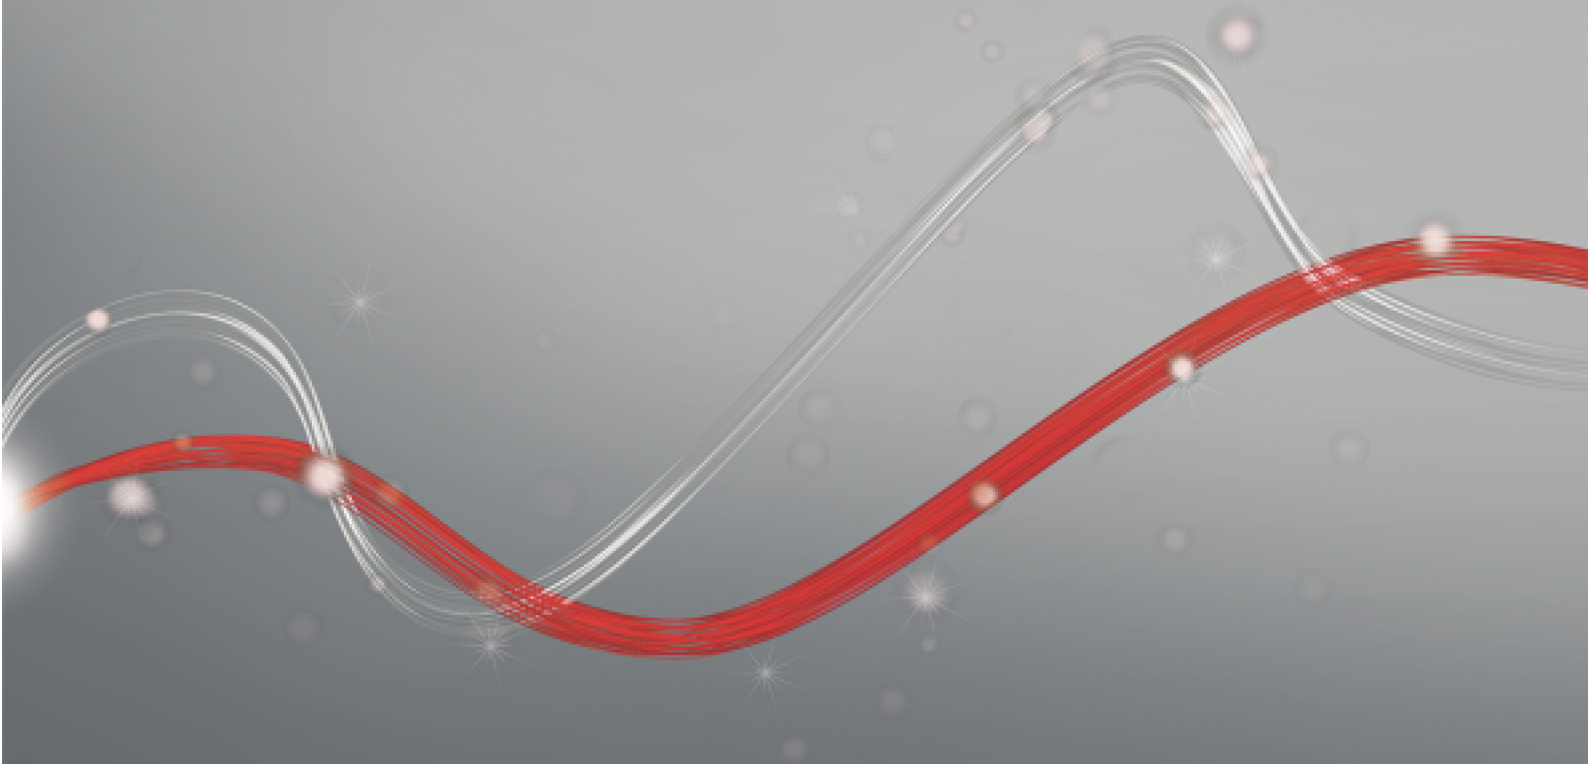





# SMARTLIGHT VMS



## SMARTLIGHT

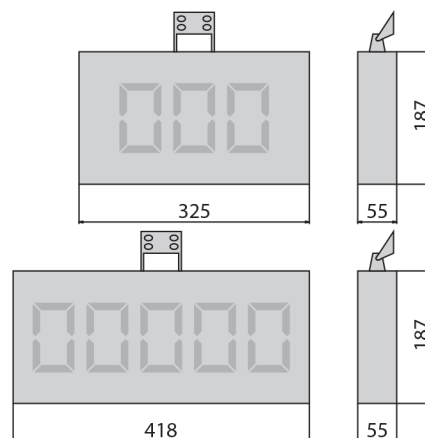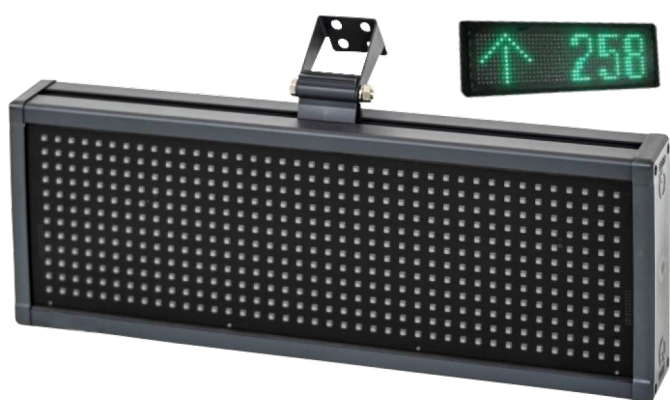

Pantalla RGB a todo color que muestra el estado de cada plaza de estacionamiento en tiempo real.

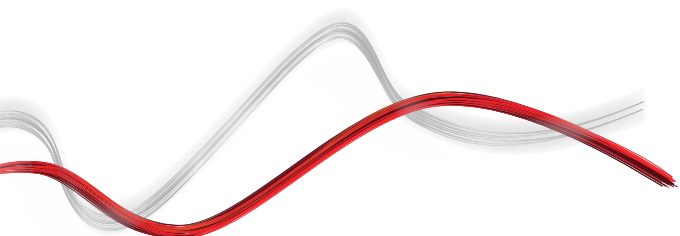



## SMARTLIGHT

## SMARTLIGHT VMS

| Código | Ci      | Nombre            | Descripción                                                                                                                                                                                                                                         |
|--------|---------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 135841 | 2605992 | SMARTLIGHT VMS 3D | Pantalla RGB a todo color que muestra el estado de cada plaza de estacionamiento en tiempo real. Caja IP65 para uso interior/exterior, 3 dígitos LED que indican las plazas libres, soportes, fuente de alimentación de 24 V, intensidad ajustable. |
| 135843 | 2605994 | SMARTLIGHT VMS 4D | Pantalla RGB a todo color que muestra el estado de cada plaza de estacionamiento en tiempo real. Caja IP65 para uso interior/exterior, 4 dígitos LED que indican las plazas libres, soportes, fuente de alimentación de 24 V, intensidad ajustable. |

|                               | SMARTLIGHT VMS 3D                     | SMARTLIGHT VMS 4D                     |
|-------------------------------|---------------------------------------|---------------------------------------|
| Tensión de alimentación       | 24 VDC $\pm$ 10%                      | 24 VDC $\pm$ 10%                      |
| Consumo de energía máximo     | 50 W                                  | 50 W                                  |
| Brillo                        | 22,95 cd/m <sup>2</sup>               | 22,95 cd/m <sup>2</sup>               |
| Temperatura de funcionamiento | -40 $\div$ 60 °C                      | -40 $\div$ 60 °C                      |
| Dimensiones                   | 325x187x55 mm                         | 418x187x55 mm                         |
| Grado de protección           | IP65                                  | IP65                                  |
| Interfaz de comunicación      | RS485                                 | RS485                                 |
| Conexión recomendada          | 4 conductores 18 AWG + cable blindado | 4 conductores 18 AWG + cable blindado |



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.