




Be ahead



ESPAS 30-I ULTRA

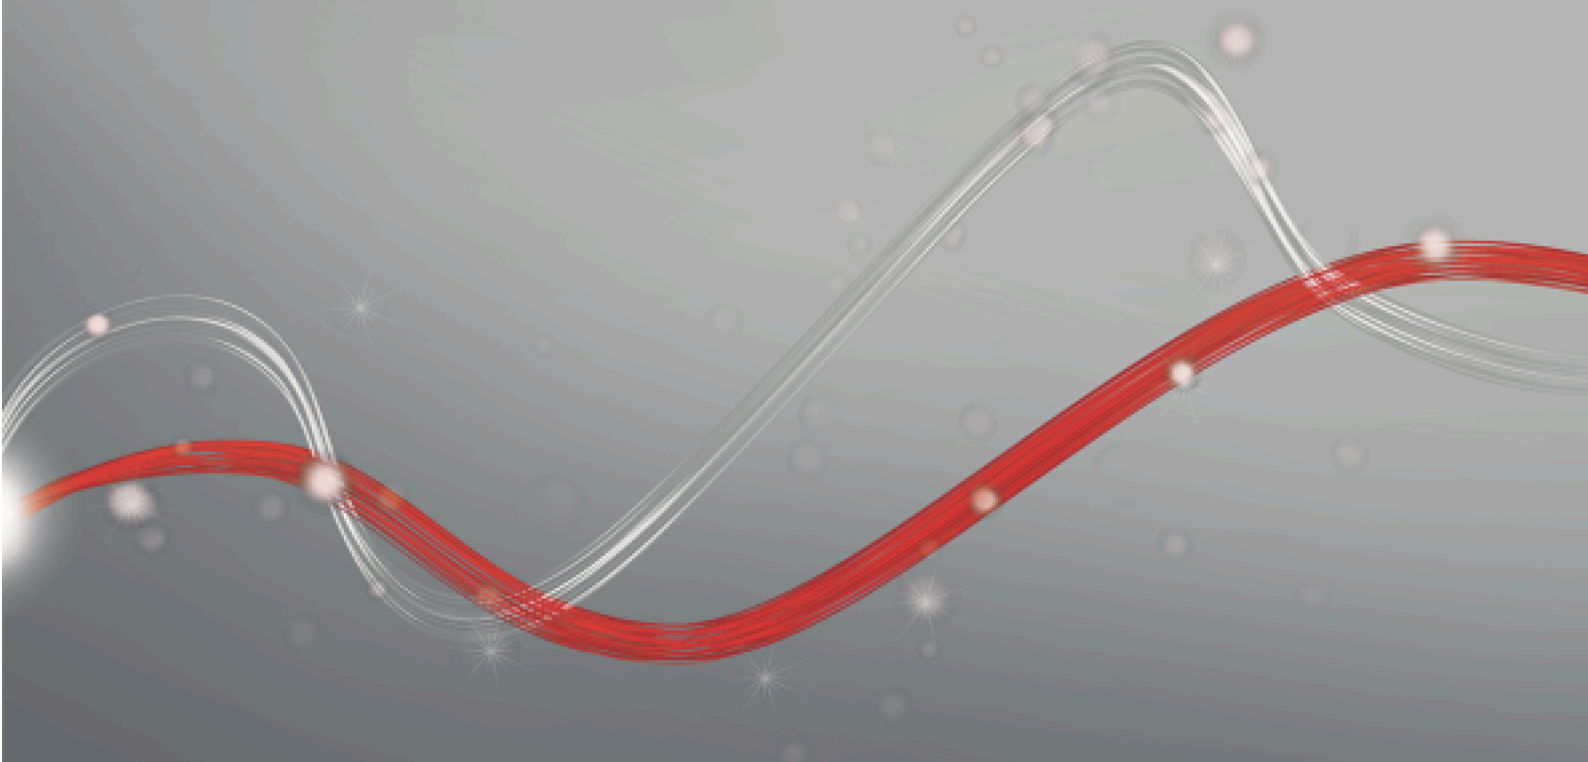




ESPAS 30-I ULTRA



ESPAS 30 ULTRA

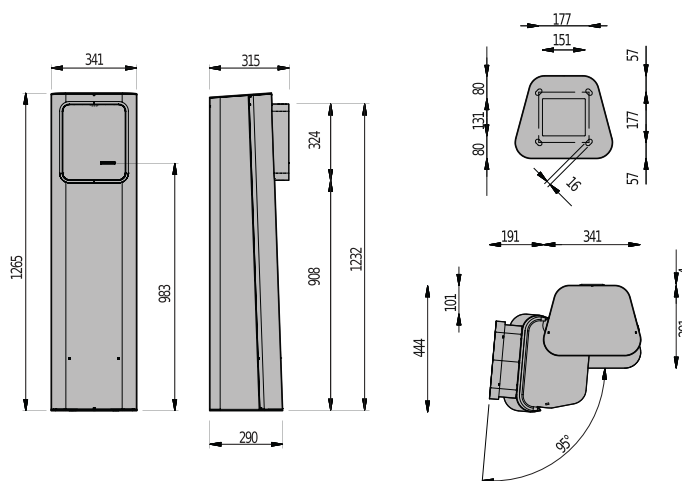

The ESPAS 30-I ULTRA station is a device for managing an entry gate to a parking area.

The unit works in a wired network

as a component between the other elements of the system.

The station performs the rapid issuing of barcode tickets,

management of subscription and operator cards.

The display and voice messages guide improve the user experience.

		ESPAS 30-I ULTRA
Supply voltage		230 VAC $\pm 10\%$, 50Hz-60Hz
Max power consumption		200 W
Idle power consumption		70 W
Operating temperature		$-20 \div 50$ °C
Sizes		1265 x 341 x 315 mm
Gross weight		60 kg
Standard communication interface		RS485
Standard color		RAL7015
Material		Cabinet in 2.0 mm thick DD11 (UNI EN 10111) steel sheet; front panel in anti-wear and anti-scratch polycarbonate.

		Name	Thermal printer	Vehicle fare differentiation	Scanner	IP intercom	Bus intercom	RFID card reader	Ticket pass management	Double height low & high vehicle	Reservation management
PA2D040R10000	2606934	ESPAS 30-I ULTRA RF	●	●				●			
PA2D040R11000	2606935	ESPAS 30-I ULTRA RF CIT-BUS	●	●			●	●			













ESPAS 30-I ULTRA



ESPAS 30 ULTRA

		Name	Thermal printer	Vehicle fare differentiation	Scanner	IP intercom	Bus intercom	RFID card reader	Ticket pass management	Double height low & high vehicle	Reservation management
PA2D040R12000	2606936	ESPAS 30-I ULTRA RF CIT-IP new	●	●		●		●			
PA2D140R10000	2606794	ESPAS 30-I ULTRA SCN RF	●	●	●			●	●		●
PA2D140R11000	2606939	ESPAS 30-I ULTRA SCN RF CIT-BUS new	●	●	●		●	●	●		●
PA2D140R12000	2606940	ESPAS 30-I ULTRA SCN RF CIT-IP	●	●	●	●		●	●		●
PA6D040R10000	2607401	ESPAS 30-IH ULTRA RF new	●	●				●		●	
PA6D040R11000	2607402	ESPAS 30-IH ULTRA RF CIT-BUS new	●	●			●	●		●	
PA6D140R12000	2607532	ESPAS 30-IH ULTRA SCN RF CIT-IP new	●	●	●	●		●	●	●	●






RECOMMENDED ACCESSORIES

 <p>Cp 21261 - Ci 2606001 KIT STATIONS ANCHOR BASE</p> <p>Column anchor base for 20/30 entry/exit terminals</p>	 <p>Cp D110945 - Ci 2607227 MAGNETIC LOOP 6MT</p> <p>High sensivity pre-cabled magnetic loop (10m tail x 6m loop)</p>
 <p>Cp D141784 - Ci 2607232 MAGNETIC LOOP 8MT</p> <p>High sensivity pre-cabled magnetic loop (10m tail x 8m loop)</p>	 <p>Cp D121711 - Ci 2605801 HEATER UNIT</p> <p>Heater unit 60W for internal station/POF installation on DIN bar</p>
 <p>new Cp 385256 - Ci 2604461 TRAFFIC LIGHT 3 LED 100MM</p> <p>Traffic light with three LED lights (red - red - green) with high brightness for transit regulation. Complete with LED lamps. Diam. 100mm</p>	 <p>Cp 130198 - Ci 2605635 TRAFFIC LIGHT LED 100MM</p> <p>Traffic light, 2 LEDs light, diam. 100mm</p>
 <p>Cp D413445 - Ci 2605793 TRUCK HEIGHT PEDESTAL 800MM</p> <p>800mm height pedestal, with door, for entry/exit column</p>	 <p>Cp D413530 - Ci 2605794 BUS HEIGHT PEDESTAL 600MM</p> <p>600mm height pedestal, with door, for entry/exit column</p>
 <p>Cp D113999 - Ci 2605754 LOOP DETECTOR LITE</p> <p>2 channel loop detector, 24VDC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase</p>	 <p>Cp D113948 - Ci 2605737 LOOP DETECTOR PRO</p> <p>2 channel loop detector, 24VDC/AC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase. Direction detection.</p>



ESPAS 30 ULTRA

RECOMMENDED ACCESSORIES

	Cp P800138 - Ci 2606835 KIT DENEb TO DENEb Additional board used to communicate between two stations in "Two Ways" and "Double Height" configuration. For 30 system only.		Cp P800137 - Ci 2606776 KIT INTERLOCK FOR PARKING Kit for manage interlock function (station between two barriers), useful to prevent queues on the gate or for particularly security requirements. It's usable when a third loop management is required (e.g. motorbike). Includes a loop detector for the second barrier safety loop and a kit of terminals in order to connect the commands of the second barrier.
	Cp 394080 - Ci 2607023 PRESENCE AND SAFETY DETECTOR - LASER LOOPS Presence and Safety laser detector. Its used as an alternative of magnetic loops. Includes one input and two relay outputs. Maximum detection range: 9.9m x 9.9m. 10-35VDC power supply.		Cp 394073 - Ci 2604478 LASER SAFATEY DETECTOR Safety laser detector. Its used in combination with magnetic loops in order to add an additional safety device (eg: for pedestrian). Includes two relay outputs. Maximum detection range: 5m x 5m. 10-35VDC power supply.
	Cp 394075 - Ci 2607020 LASER DETECTOR REMOTE CONTROL Remote control for settings Safety laser detector and Presence and Safety Laser detector.		Cp P800132 - Ci 2606775 485-TCP/IP CONVERTER KIT The device allows the insertion within a wired TCP/IP network of devices using an RS-485 serial interface. The solution is used in all those realities where it is necessary to transmit serial data through, for example, a local network already present.
	Cp 394160 - Ci 2605636 PALO ø60 H3600 Galvanized steel pole support for panels and traffic lights. Diam. 60mm - h 3600mm		



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.