




ESPAS 30-U CC ULTRA






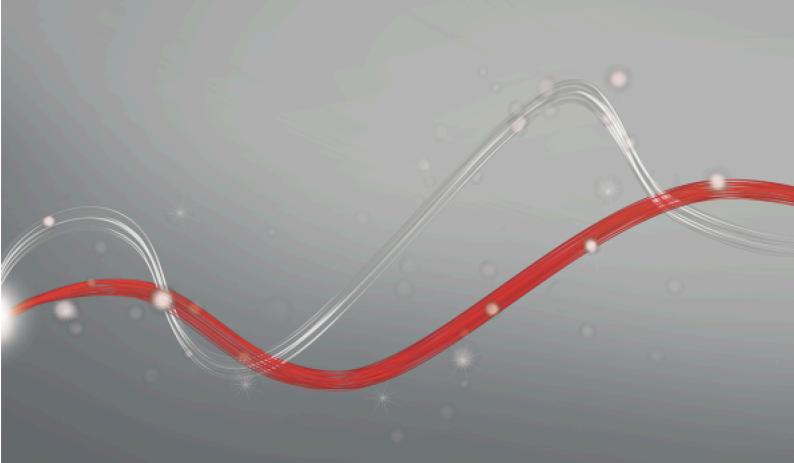


ESPAS 30 ULTRA









The Espas 30-U CC Ultra station is a device for managing an exit gate from a parking area and allows payment of the parking by credit card, scanning the entry ticket.

The unit works in a wired network

as a component between the other elements of the system.

Equipped with ticket scanner and discount amount, proximity reader for operator and subscriber card, C/C terminal with CHIP and PIN and contactless. The display and voice messages guide improve the user experience.

	ESPAS 30-U CC ULTRA				
Supply voltage	230 VAC ±10%, 50Hz-60Hz				
Max power consumption	230 W				
Idle power consumption	90 W				
Operating temperature	-20 ÷ 50 °C				
Sizes	1265 x 341 x 364 mm				
Gross weight	65 kg				
Standard communication interface	RS485 – TCP/IP				
Standard color	RAL7015				
Material	Cabinet in 2.0 mm thick DD11 (UNI EN 10111) steel sheet; front panel in anti-wear and anti-scratch polycarbonate.				

		Name	Thermal printer	Scanner	IP intercom	RFID card reader	Ticket pass management	Credit card
PA4D141R10000	2606975	ESPAS 30-U CC ULTRA SCN CC-ITA RF	•	•		•	•	•
PA4D141R12000	2613234	ESPAS 30-U CC ULTRA SCN CC-ITA RF CIT-IP	•	•	•	•	•	•



ESPAS 30-U CC ULTRA



ESPAS 30 ULTRA

		Name	Thermal printer	Scanner	IP intercom	RFID card reader	Ticket pass management	Credit card
PA4D142R10000	2606976	ESPAS 30-U CC ULTRA SCN CC-FRA RF	•	•		•	•	•
PA4D142R12000	2613235	ESPAS 30-U CC ULTRA SCN CC-FRA RF CIT-IP	•	•	•	•	•	•
PA4D143R10001	2613236	ESPAS 30-U CC ULTRA SCN CC-UK RF	•	•		•	•	•
PA4D143R12000	2613237	ESPAS 30-U CC ULTRA SCN CC-UK RF CIT-IP	•	•	•	•	•	•
PA4D145R10002	2613238	ESPAS 30-U CC ULTRA SCN CC-AUS RF	•	•		•	•	•
PA4D145R12000	2607027	ESPAS 30-U CC ULTRA SCN CC-AUS RF CIT-IP	•	•	•	•	•	•

RECOMMENDED ACCESSORIES

RECU	RECUMINIENDED ACCESSORIES						
	<u>Cp</u> 21261 - <u>Ci</u> 2606001 KIT STATIONS ANCHOR BASE	_	<u>Cp</u> D110945 - <u>Ci</u> 2607227 MAGNETIC LOOP 6MT				
	Column anchor base for 20/30 entry/exit terminals		High sensivity pre-cabled magnetic loop (10m tail x 6m loop)				
	<u>Cp</u> D141784 - <u>Ci</u> 2607232 MAGNETIC LOOP 8MT		Cp D121711 - Ci 2605801 HEATER UNIT				
0	High sensivity pre-cabled magnetic loop (10m tail x 8m loop)		Heater unit 60W for internal station/POF installation on DIN bar				
cai ^r	© 385256 - Ci 2604461 TRAFFIC LIGHT 3 LED 100MM	eal ^d	Cp 130198 - Ci 2605635 TRAFFIC LIGHT LED 100MM				
ď	Traffic light with three LED lights (red - red - green) with high brightness for transit regulation. Complete with LED lamps. Diam. 100mm		Traffic light, 2 LEDs light, diam. 100mm				
	Cp D413445 - Ci 2605793 TRUCK HEIGHT PEDESTAL 800MM	_	Cp D413530 - Ci 2605794 BUS HEIGHT PEDESTAL GOOMM				
	800mm height pedestal, with door, for entry/exit column		600mm height pedestal, with door, for entry/exit column				
MATERIAL	<u>Cp</u> D113999 - <u>Ci</u> 2605754 LOOP DETECTOR LITE	diane	<u>Cp</u> D113948 - <u>Ci</u> 2605737 Loop Detector Pro				
	2 channel loop detector, 24VDC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase		2 channel loop detector, 24VDC/AC, up to 4 frequencies per channel for close loop installations, adjustable sensitivity, boost function for sensitivity increase. Direction detection.				
	<u>Cp</u> P800137 - <u>Ci</u> 2606776 KIT INTERLOCK FOR PARKING		<u>Cp</u> 394080 - <u>Ci</u> 2607023 PRESENCE AND SAFETY DETECTOR - LASER LOOPS				
	Kit for manage interlock function (station between two barriers), useful to prevent queues on the gate or for particularly security requirements. It's usable when a third loop management is required (e.g. motorbike). Includes a loop detector for the second barrier safety loop and a kit of terminals in order to connect the commands of the second barrier.		Presence and Safety laser detector. Its used as an alternative of magnetc loops. Includes one input and two relay outputs. Maximum detection range: 9.9m x 9.9m.10-35VDC power supply.				



ESPAS 30-U CC ULTRA



ESPAS 30 ULTRA

RECOMMENDED ACCESSORIES



<u>Cp</u> 394073 - <u>Ci</u> 2604478 LASER SAFATEY DETECTOR

Safety laser detector. Its used in combination with magnetc loops in order to add an additional safety device (eg: for pedestrian). Includes two relay outputs. Maximum detection range: 5m x 5m.10-35VDC power supply.



The device allows the insertion within a wired TCP/IP network of devices using an RS-485 serial interface. The solution is used in all those realities where it is necessary to transmit serial data through, for example, a local network already present.



Cp 394075 - **Ci** 2607020 LASER DETECTOR REMOTE CONTROL

Remote control for settings Safety laser detector and Presence and Safety laser detector.

<u>Cp</u> 394160 - <u>Ci</u> 2605636 PALO ø60 H3600

Galvanized steel pole support for panels and traffic lights. Diam. 60mm - h 3600mm









INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BET PRODUCTS RESULTING BROWN STUDIES AND DESIGNS WITHIN THE BET COMPANY.