



Be ahead



VISTA SW 350






VISTA SW 350




Automation systems for automatic pedestrian doors

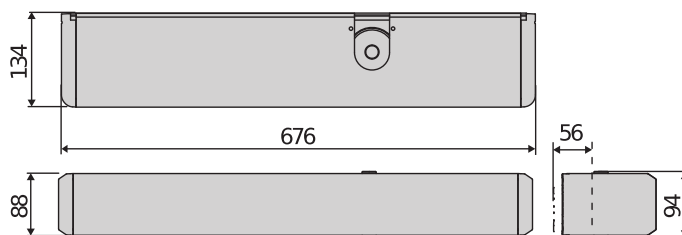

Automation for swing doors for automating large and very heavy leaves.

Available with motorised control of opening and closing and with control of closing return spring. The version with spring is suitable for use on fire doors.

Designed for frequent and intensive use, typical of healthcare facilities and hotels.

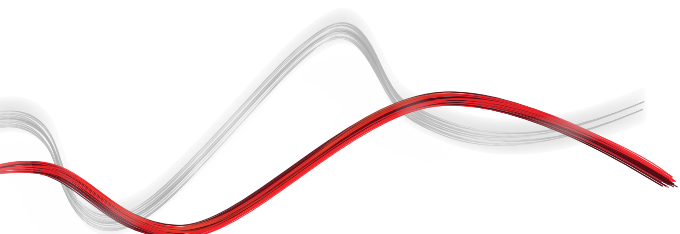



Automation systems for automatic pedestrian doors

VISTA SW 350

Code	Ci	Name	Description
P960578 00002	2605487	VISTA SW 350 MXL PORTA BATTENTE SENZA MOLLA	Operator for swing doors with motor opening and closing. Maximum leaf weight 350 kg. Ideal for "fail safe" installations (battery management) Ideal for "fail safe" installations (management with batteries)
P960577 00002	2605486	VISTA SW 350 SXL PORTA BATTENTE CON MOLLA	Operator for swing doors with motor and return spring. Door panel with maximum weight of 350 kg. Ideal for "low energy" installations (spring closure) and on fire doors. Ideal for "low energy" installations (spring closure) and on fire doors

	VISTA SW 350 MXL PORTA BATTENTE SENZA MOLLA	VISTA SW 350 SXL PORTA BATTENTE CON MOLLA
Leaf type	Swing	Swing
Closing	With motor	With return spring
Number of gate panels	1	1
Max Leaf	350 kg	350 kg
Max automation dimensions	134x95x676 mm	134x95x676 mm
Clear opening	700 ÷ 1400 mm	700 ÷ 1400 mm
Maximum opening angle	110 °	110 °
Opening speed per leaf	up to 70 °/sec	up to 70 °/sec
Closing speed per leaf	up to 40 °/sec	up to 40 °/sec
Control unit	Digital display and dip switch	Digital display and dip switch
Motor voltage	24 V	24 V
Motor type	Dunker	Dunker
Power supply	230V ±10% AC 50/60Hz	230V ±10% AC 50/60Hz
Nominal power	85 W	85 W
Shaft max output torque	45 Nm	45 Nm
Frequency of use	Continuous	Continuous
Anti-crushing function	Force automatically limited in presence of obstacles	Force automatically limited in presence of obstacles
Type of limit switch	encoder	encoder
Emergency operation	with emergency back-up battery (optional)	with emergency back-up battery (optional)
Manual cycle	Reversible	Reversible
Locking	Solenoid Lock	Solenoid Lock
Operating temperature	-10 ÷ 50 °C	-10 ÷ 50 °C
Protection rating	IP40	IP40
Use with fire doors.	-	SI (EN1634-1)






VITAL ACCESSORIES

	Cp D113789 - Ci 2607504 VISTA SEL SW		Cp P111563 00001 - Ci 2600979 EXT ASW 350 XL 30
	Function selector Vista SW		Vista SW 260 XL arm connection, spacer
	Cp P111563 00002 - Ci 2605138 EXT ASW 350 XL 50		Cp P111563 00003 - Ci 2605139 EXT ASW 350 XL 70
	Arm connection L=50 mm Vista SW XL, spacer		Arm connection L=70 mm Vista SW XL, spacer



Automation systems for automatic pedestrian doors

VITAL ACCESSORIES

	Cp P111563 00004 - Ci 2605140 EXT ASW 350 XL 90		Cp P111564 - Ci 2607185 BBV SW 350 MXL
	Arm connection L=90 mm Vista SW XL, spacer		Emergency battery kit for Vista SW MXL, compatible with SXL with external installation
	Cp P111565 - Ci 2605142 ASW 350 XL RIG		Cp P111566 - Ci 2605143 ASW 350 XL ART
	Vista SW XL rigid pull arm. Jamb max dims.: 100 mm		Vista SW XL articulated push arm. Max jamb dims.: 150 mm
	Cp P111567 - Ci 2605144 ASW 350 XL ARTL		
	Vista SW XL long articulated push arm. Jamb dims. 150 mm		

RECOMMENDED ACCESSORIES

	Cp P111657 00003 - Ci 2611320 4SAFE IR SAFETY SENSOR MONIT.SW/2MOD/900		Cp P111657 00002 - Ci 2611319 4SAFE IR SAFETY SENSOR MONIT.SW/2MOD/700
	Monitored IR safety sensor for side-hung leaves, 2 modules, 900 mm		Monitored IR safety sensor for side-hung leaves, 2 modules, 700 mm
	Cp P111657 00001 - Ci 2611318 4SAFE IR SAFETY SENSOR MONIT.SW/1MOD/700		Cp P111656 - Ci 2611317 VIO-ST
	Monitored IR safety sensor for side-hung leaves, 1 module, 700 mm		Infrared safety sensor, monitored
	Cp P111756 - Ci 2611359 OA-EDGE T 340 1M		Cp P111757 - Ci 2611360 OA-EDGE T 700 1M
	Active infrared sensor for security L 340 mm with 1 module with safety test		Active infrared sensor for security L 700 mm with 1 module with safety test
	Cp P111758 - Ci 2613114 OA-EDGE T 1200 2M		Cp P111759 - Ci 2611361 OT 3
	Active infrared sensor for security L 1200 mm with 2 modules with safety test		Elbow-operated pushbutton, silver
	Cp P111568 - Ci 2605145 TSWP 350 XL		
	Profiles Vista SW double, 1,5 m.		



Automation systems for automatic pedestrian doors

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.





Automation systems for automatic pedestrian doors

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Automation systems for automatic pedestrian doors



U-LINK 2.0

AN UPDATED VERSION OF
U-LINK TO GIVE YOU EVEN
MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Automation systems for automatic pedestrian doors

-SECURITY

A NEW AND EVEN MORE SECURE RADIO PROTOCOL



➤ **Secure**

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



➤ **Easy**

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



➤ **Universal**

The radio protocol is also compatible with the previous generation of receivers

