



Be ahead





GIOTTO BT B ULTRA 36





GIOTTO BT B ULTRA 36

Road barriers

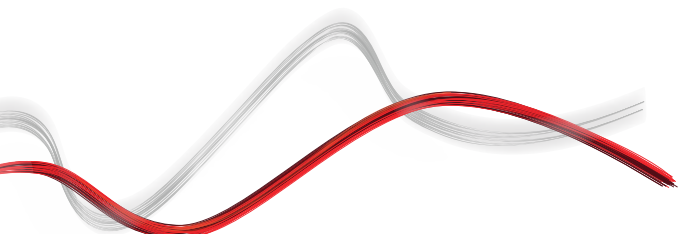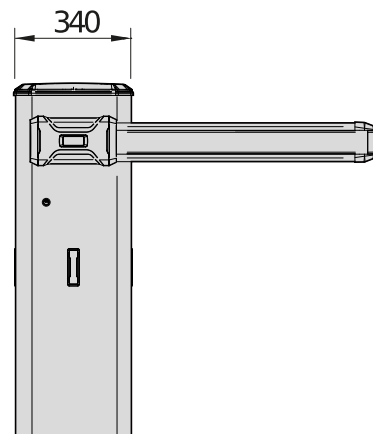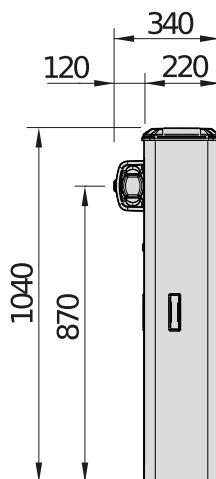


Cp	Codice prodotto
Ci	Codice internazionale

	U-Link
	New
	Phase-out



GIOTTO BT B ULTRA 36


Road barriers



-



-

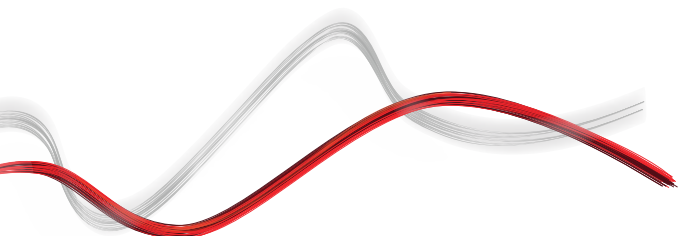

Cp	Codice prodotto
Ci	Codice interna zionale

	U-Link
	New
	Phase-out



GIOTTO BT B ULTRA 36

Road barriers

GIOTTO BT B ULTRA 36

Koodi	Ci	Nimi		Kuvaus
P940111 00001	2617847	GIOTTO BT B ULTRA36 120V	new	Barrier with 24 V motor for opening from 2 to 6 metres and opening time from 2.2 to 4 s. 110-120V power supply. Balancing spring kit to be purchased separately. Reaction to impact via Encoder. Colour grey, RAL 7015. Integrated control unit with U-Link connectivity.
P940111 00101	2617848	GIOTTO BT B ULTRA36 120V RAL	new	Barrier with 24 V motor for opening from 2 to 6 metres and opening time from 2.2 to 4 s. 110-120V power supply. Balancing spring kit to be purchased separately. Reaction to impact via Encoder. Colour grey, special RAL. Integrated control unit with U-Link connectivity.
P940111 00002	2617937	GIOTTO BT B ULTRA36 230V	new	Barrier with 24 V motor for opening from 2 to 6 metres and opening time from 2.2 to 4 s. 220-230V power supply. Balancing spring kit to be purchased separately. Reaction to impact via Encoder. Colour grey, RAL 7015. Integrated control unit with U-Link connectivity.
P940111 00012	2617940	GIOTTO BT B ULTRA36 230V RAL	new	Barrier with 24 V motor for opening from 2 to 6 metres and opening time from 2.2 to 4 s. 220-230V power supply. Balancing spring kit to be purchased separately. Reaction to impact via Encoder. Colour grey, special RAL. Integrated control unit with U-Link connectivity.

MERAK GIOTTO ULTRA 36 230 V: Built-in control unit for the Giotto Ultra 230 V barrier

MERAK GIOTTO ULTRA 36 230 V - Cp I200486 10001 - Ci 2613697 - Sisäänrakennettu -



- Taulun virtalähde: 230 V, yksivaiheinen
- Main Features: built-in receiver, reversal of movement on detecting obstacles, control of lights and external I/O


MERAK GIOTTO ULTRA 36 120V: Built-in control unit for the Giotto Ultra 120 V barrier

MERAK GIOTTO ULTRA 36 120V - Cp I200487 10001 - Ci 2613698 - Sisäänrakennettu -



- Panel power supply:
- Main Features: built-in receiver, reversal of movement on detecting obstacles, control of lights and external I/O

	GIOTTO BT B ULTRA36 120V	GIOTTO BT B ULTRA36 120V RAL	GIOTTO BT B ULTRA36 230V	GIOTTO BT B ULTRA36 230V RAL
Läpikulkuväylä (maks.)	4 m	4 m	4 m	6 m
Moottorin virransyöttö	24 V	24 V	24 V	24 V
Ohjausyksikkö	MERAK GIOTTO ULTRA 36	MERAK GIOTTO ULTRA 36	MERAK GIOTTO ULTRA 36	MERAK GIOTTO ULTRA 36
Hidastus	Kyllä	Kyllä	Kyllä	Kyllä
Reagointi iskuun	Enkooderi	Enkooderi	Enkooderi	Enkooderi
Käyttötaajuus	erittäin intensiivinen	erittäin intensiivinen	erittäin intensiivinen	erittäin intensiivinen
Ympäristöolosuhteet	-20+55 °C	-20+55 °C	-20+55 °C	-20+55 °C
Suojausluokka	IP54	IP54	IP54	IP54






GIOTTO BT B ULTRA 36

Road barriers

	Cp P120104 00001 - Ci 2612607 BOOM ES30 Aluminium bar for 3 m wide openings. Rubber strips and lights not included.		Cp P120104 00002 - Ci 2612608 BOOM ES40 Aluminium bar for 4 m wide openings. Rubber strips and lights not included.
	Cp P120104 00003 - Ci 2612609 BOOM ES50 Aluminium bar for 5 m wide openings. Rubber strips and lights not included.		Cp P120104 00004 - Ci 2612610 BOOM ES60 Aluminium bar for 6 m wide openings. Rubber strips and lights not included.
	Cp P120117 00001 - Ci 2613384 PCA ES N3 Lower and upper protective rubber strip kit for 3 m BOOM ES. Blanking plugs and fastening clips for lights included.		Cp P120117 00002 - Ci 2613385 PCA ES N4 Lower and upper protective rubber strip kit for 4 m BOOM ES. Blanking plugs and fastening clips for lights included.
	Cp P120117 00003 - Ci 2613386 PCA ES N5 Lower and upper protective rubber strip kit for 5 m BOOM ES. Blanking plugs and fastening clips for lights included.		new Cp P120117 00004 - Ci 2617951 PCA ES N6 Lower and upper protective rubber strip kit for 6 m BOOM ES. Blanking plugs and fastening clips for lights included.
	Cp P120103 - Ci 2612606 OMEGA ES Barrier clamp, casing for hand protection and screws for BOOM ES on Giotto Ultra 36. Barrier not included.		Cp P120087 00001 - Ci 2601376 BOOM PS30 Aluminium bar, opening L = 3 m with red reflectors. Includes rubber and upper optical diffuser. Lights excluded.
	Cp P120087 00002 - Ci 2601377 BOOM PS40 Aluminium bar, opening L = 4 m with red reflectors. Includes rubber and upper optical diffuser. Lights excluded.		Cp P120087 00003 - Ci 2601378 BOOM PS50 Aluminium bar, opening L = 5 m with red reflectors. Includes rubber and upper optical diffuser. Lights excluded.
	Cp P120087 00004 - Ci 2601277 BOOM PS60 Aluminium bar, opening L = 6 m with red reflectors. Includes rubber and upper optical diffuser. Lights excluded.		Cp P120100 - Ci 2605247 OMEGA PS GIOTTO ULTRA 36 Barrier clamp, casing for hand protection and screws for BOOM PS on Giotto Ultra 36. Barrier not included.

SUOSITELTAVAT LISÄVARUSTEET

	new Cp P120125 - Ci 2617945 TOP LIGHT GU36 Light ring to be placed under the barrier cap. Includes red/green LED lights and fixing brackets. Barrier cap not included.		new Cp P120126 - Ci 2617949 KIT ML65-L Balancing spring kit for bar length up to 4 metres.
	new Cp P120127 - Ci 2617950 KIT ML81-H Balancing spring kit for bar length up to 6 metres.		Cp P120089 20001 - Ci 2605241 LIGHT PS/ES 30-IP67 High intensity LED lighting kit, red-green, to be fitted on BOOM PS/ES bar up to 3 metres long. Power supply unit excluded.
	Cp P120089 20002 - Ci 2605242 LIGHT PS/ES 40-IP67 High intensity LED lighting kit, red-green, to be fitted on BOOM PS/ES bar up to 4 metres long. Power supply unit excluded.		Cp P120089 20003 - Ci 2605243 LIGHT PS/ES 50-IP67 High intensity LED lighting kit, red-green, to be fitted on BOOM PS/ES bar up to 5 metres long. Power supply unit excluded.
	Cp P120089 20004 - Ci 2605244 LIGHT PS/ES 60-IP67 High intensity LED lighting kit, red-green, to be fitted on BOOM PS/ES bar up to 6 metres long. Power supply unit excluded.		Cp P120116 - Ci 2601492 GT BOARD Power supply unit for LIGHT PS/ES lights for Giotto Ultra 36

Cp	Codice prodotto
Ci	Codice internazionale


	U-Link
new	New
Pl Out	Phase-out



GIOTTO BT B ULTRA 36

Road barriers

SUOSITELTAVAT LISÄVARUSTEET

	Cp P120122 - Ci 2614971 ART90 PS GIOTTO ULTRA36 KIT Hinge accessories kit for PS 90° articulated bar on Giotto Ultra 36. Excludes tie rod, bar, bar connector and PS lights. Compatible with PS BOOMS		Cp P120121 - Ci 2614918 TIE ROD FOR ART90 PS KIT Tie rod to be combined with the hinge accessories kit for PS 90° articulated bar. Compatible with ART 90 PS MAXIMA ULTRA KIT 36 and ART 90 GIOTTO ULTRA 36 KIT
	Cp P120092 00006 - Ci 2614231 ART90 BOOM PS30 GIOTTO ULTRA36 BOOM PS 90° articulated bar L = 3 m pre-assembled. Excludes LIGHT PS lighting. Compatible with Giotto Ultra 36.		Cp P120092 00007 - Ci 2614227 ART90 BOOM PS50 GIOTTO ULTRA36 BOOM PS 90° articulated bar L = 5 m pre-assembled. Excludes LIGHT PS lighting. Compatible with Giotto Ultra 36.
	Cp P120085 - Ci 2601279 BTM-SKIRT Lower skirt for BOOM PS booms. Module length L = 2 m.		Cp P120095 - Ci 2601389 BRACKET SKIRT Connection bracket between barrier body and simple (BTM SKIRT) or double (FULL SKIRT) aluminium rack.
	Cp P120093 - Ci 2613063 ADJ-FOOT Suspended cushioned telescopic supporting foot for BOOM PS booms.		Cp P120074 - Ci 2607202 GIOTTO M BG BAT KIT Puskuriakku GIOTTO BT A -sarjan ajoesteelle
	Cp P111782 - Ci 2601411 COMPACTA A20-180 Valokennopari, jota voi säätää 180° vaakasuunnassa. 20 metrin alue. 12-33 VAC/15-35 VDC virransyöttö.		Cp P111274 - Ci 2611230 RME 1 BT Metallimassatunnistin, 24 V, yksikanavainen, asennussokkelilla
	Cp P903031 - Ci 2605301 BMC A Sovitinpari THEA- ja DESME-sarjojen valokennojen asentamiseksi CC-sarjan pylväisiin		Ph. Out Cp D730251 - Ci 2608500 CBO Base plate for mod. MOOVI - GIOTTO
	new Cp P120128 - Ci 2617952 CBO PRO Foundation template and clamps for installation of Giotto Ultra 36 barriers/Moovi AC.		Cp P120080 - Ci 2601319 FAF UNI R Universal adjustable fork for all rods; recommended with installation of FULL SKIRT accessory.
	Cp P111786 - Ci 2605171 LOOP DETECTOR PRO 230V Metal object detector, 2 channels, 230VAC, up to 4 frequencies per channel for installation of adjacent coils, adjustable sensitivity level, boost function for increasing sensitivity, direction of travel management		Cp P111001 00003 - Ci 2611209 RME 2 Metallimassatunnistin, 230 V, kaksikanavainen, asennussokkelilla
	Cp P120023 - Ci 2600216 FAF 2 Tukihaarukka puomeille. Ruuvataan maahan.		Cp P120023 00100 - Ci 2613115 FAF 2 RAL Tukihaarukka, kiinteä, maalatuille puomeille, väri yksilöllinen RAL. Ruuvataan maahan.
	Cp P120026 - Ci 2605194 ZFAF2 Lisäkiristimet FAF2-mallisten haarukoiden kiinnittämiseksi sementillä maahan.		Cp D110926 00001 - Ci 2600569 SPIRA 2X1 Magneettikäämi 2 x 1 m
	new Cp D112306 - Ci 2614118 MITTO COOL C2 2-Channel transmitter. 50/100 m range. 3V power supply with 1 CR2032 type battery. Blue.		new Cp D112318 - Ci 2614120 MITTO COOL C4 4-Channel transmitter. 50/100 m range. 3V power supply with 1 CR2032 type battery. Blue.

Cp	Codice prodotto
Ci	Codice internazionale

	U-Link
new	New
Ph. Out	Phase-out



Road barriers

Mikä U-Link on?

Teknologia, jonka avulla voit hallita järjestelmiä tehokkaammin

U-Link, Universal Link, on BFT:n korkealuokkainen laitteisto, jonka avulla voi luoda huipputeknisiä ekosysteemejä. Home Access Automation -käyttösovelluksissa sen avulla voidaan kommunikoida minkä tahansa tuotemerkin kaikkien kodin kulkuun liittyvien automaatiojärjestelmien kanssa. Tämän laitteiston avulla voit säästää aikaa ja hallita kaikkia järjestelmiä helposti ja huolettomasti.

Se on intuitiivinen

Helppo asentaa ja helppo käyttää

Sitä voi laajentaa

Voit lisätä niin monta laitetta kuin haluat

Se on joustava

Voit luoda yhteen liitettyjen tuotteiden ryhmiä

Se on käytännöllinen

Toimii verkkoyhteyden kanssa tai ilman

Se on toiminnallinen

Sen asetuksia voi hallita etänä siihen tarkoitetuilla sovelluksilla



Kaikki yhdessä ruudussa:
tutustu tarkemmin tähän hämmästyttävään teknologiaan

Tämä patentoitu laitteisto, joka on BFT-tuotteiden avainominaisuus, sopii B-EBA-korttien ja Clonix U-Link -vastaanottimen ansiosta mille tahansa protokollalle tai tuotteelle liittyen kulun automaatiojärjestelmiin (mukaan lukien BFT:n tuotteet ja muut kuin BFT:n tuotteet ja vanhat versiot) ja sitä voi käyttää useilla eri sektoreilla. Tämä tarkoittaa, että mistä tahansa laitteesta voi tulla älylaite, joka voidaan liittää muihin järjestelmiin käyttämällä kieltä, josta on tulossa universaali.




U-Control HOME on sovellus, jolla voit avata kotipiorttisi ja hallita BFT:n automaatiojärjestelmiä etänä omalla älypuhelimellasi. iOS-versiolla voi avata automaattisesti automaatiojärjestelmän sen lähellä oltaessa.



Ohjelmistopaketti, jonka avulla U-Link-laitteen kanssa yhteensopivien operaattoreiden asennus, huolto ja vianmääritys voidaan suorittaa helposti ja kätevästi.



U-SDK on sovellus, jonka avulla BFT:n automaatiojärjestelmät voidaan tehdä yhteensopiviksi ja integroida helposti BMS-verkon kanssa.



Yhdistä ei-alkuperäinen U-Link ja muita kuin BFT:n tuotteita U-Link-järjestelmiin.

Voiko ei-alkuperäisiä U-Link BFT-operaattoreita tai muita tuotemerkkejä liittää U-Linkiin? Kyllä voi, Clonix-vastaanottimien ansiosta. Lisävarusteet, jotka eivät hyväksy rajoituksia.



Suora linkki operaattoreihisi.

B-EBA-lajienuskortit mahdollistavat ulkoisten laitteiden, kuten tietokoneiden, älypuhelimien ja tablettien yhdistämisen BFT-operaattorin ja Clonix-vastaanottoimeen tai useiden BFT-tuotteiden yhdistämisen U-Link-verkkoon. Nämä lisävarusteet voi integroida U-Link-teknologian ja Bluetoothin, Wifin, Z-Waven ja TCP/IP-protokollien sekä RS485-sarjaliittimen kanssa. Laite, joka edustaa juuri sitä, mitä BFT tarkoittaa yhteinliitettävyydellä.





INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.