





Be ahead



MIME



Remote control receiver

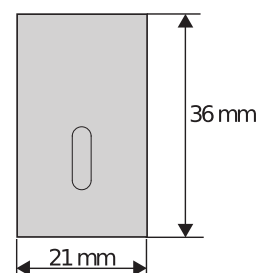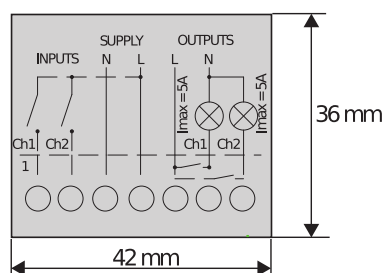

Miniaturized 2-channel indoor receiver for wireless control of lights or operators

Remote control receiver

MIME

Code	Name	Description
R400008	MIME AC PAD KIT	433MHz 2-channel indoor receiver 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control Complete with 1 MITTO 4 Clear Ice remote control
R400007	MIME AC TX KIT	433MHz 2-channel indoor receiver 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control Comes with built-in dual-channel transmitter
R400005	MIME AC KIT	433MHz 2-channel indoor receiver 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control Complete with 1 MITTO B RCB CLEAR ICE remote control
D113824	MIME AC	433 MHz 2-channel indoor receiver 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control
D113831	MIME TX	Two-channel miniaturized 433 Mhz transmitter

	MIME AC PAD KIT	MIME AC TX KIT	MIME AC KIT	MIME AC	MIME TX
Power supply	230 V	230 V	230 V	230 V	
Built-in antenna	Yes	Yes	Yes	Yes	
Type				2	
Max connectable peripherals				30	
Maximum current				2 x 5 A	
Frequency				433 MHz	
Environmental conditions	-20 ÷ 55 °C	-20 ÷ 55 °C	-20 ÷ 55 °C	-20 ÷ 40 °C	

RECOMMENDED ACCESSORIES

	P121028 - MIME PAD 4-channel wall-mounted radio control with rolling code		D111904 - MITTO B RCB02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	D111906 - MITTO B RCB04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A		D111947 - MITTO B RCB04 R1 CLEAR ICE Transmitter with 4 channels. Range 50/100 m. 12 V power supply with 1 23 A battery. Colour clear ice white. Buttons panel can be customised with own design/logo.
	D111946 - MITTO B RCB04 R1 SUNRISE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: sunrise yellow		D111945 - MITTO B RCB04 R1 VINEYARD Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: vineyard red
	N999522 - CLIP B 00 R04 Wall mounting clip for KLEIO B RCA and MITTO B RCB remote controls. 30 unit pack		P121024 - Q.BO TOUCH Wireless digital touch button panel 433 MHz rolling code. Combines with control units fitted with built-in Bft receivers or external Bft receivers.

Remote control receiver

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems.

In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications

Remote control receiver

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.

U-Base 2



A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.

U-SDK



U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.

