




Be ahead

OBERON CE






Sliding gate automation systems

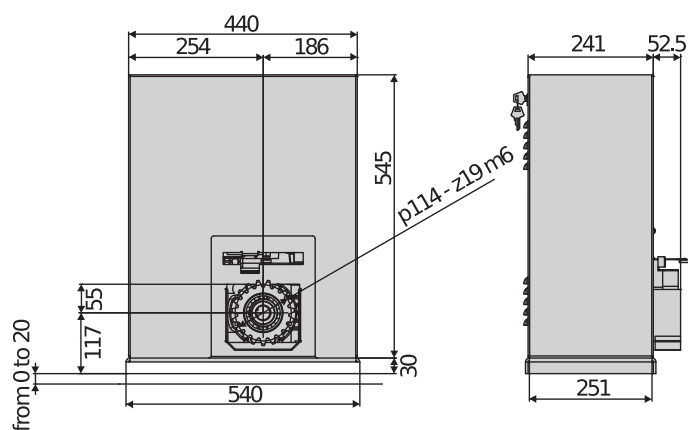

Powerful and sturdy operator with three-phase 400V power supply specifically designed for large and heavy gates. The heavy gear motor structure, galvanized painted steel casing and on-board control unit make this the ideal solution for industrial situations where reliability and power are essential.

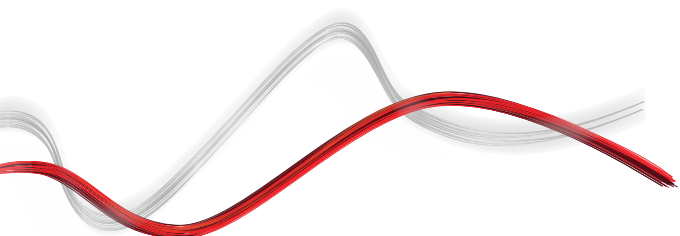



OBERON CE

Sliding gate automation systems

OBERON CE

Code	Ci	Name	Description
P925218 00002	2611579	OBERON CE	Operator 400 V for sliding gates up to 2000 kg in weight. Leaf speed up to 39 m/min. Limit switch Electromechanical.

	OBERON CE
Control unit	SIRIO C BA 230 INV
Board power supply	230 V
Motor voltage	400 V
Power consumption	750 W
Max. door/gate weight	2000 kg
Gate panel speed	up to 39 m/min
Type of limit switch	Electromechanical
Pinion module	4
Slowdown	no
Locking	Mechanical
Release	knob and personalised key
Impact reaction	stop and reversing
Frequency of use	very intensive
Protection rating	IP24
Environmental conditions	-10 ÷ 50 °C

RECOMMENDED ACCESSORIES

	Cp P111468 - Ci 2600811 B EBA RS 485 LINK Expansion board for connection of central units with serial controls management		Cp P111782 - Ci 2601411 COMPACTA A20-180 Pair of photocells adjustable 180° horizontally. 20 metre range. 12-33 VAC/15-35 VDC power supply.
	Cp D111662 - Ci 2600152 CLONIX 2 Two-channel receiver with plug 433 MHz rolling code. 128 position memory. 24 Vac power supply.		Cp D114093 00002 - Ci 2607538 RADIUS LED AC A R1 Flashing light with incorporated antenna for motors with 230 V power supply.
	Cp D571054 - Ci 2608387 CFZ galvanized steel rack, 4-module, cross-section 22 x 22 mm, length 2 m, welding attachment Max. load capacity 2000 kg.		new Cp R920110 - Ci 2611808 EDGE XL-CP99A36/CA/2000/8K/5 BFT Kit for 8k2 resistive safety edges, length 2 metres, with 99 mm-high EPDM rubber strip, aluminium section, 2 contact terminals, 2 caps, 1 x 8.2 kOhm resistance connector and connection cable.



OBERON CE

Sliding gate automation systems

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.





EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





U-LINK 2.0

AN UPDATED VERSION OF
U-LINK TO GIVE YOU EVEN
MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Sliding gate automation systems



A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.