




Be ahead





VISTA SW 260

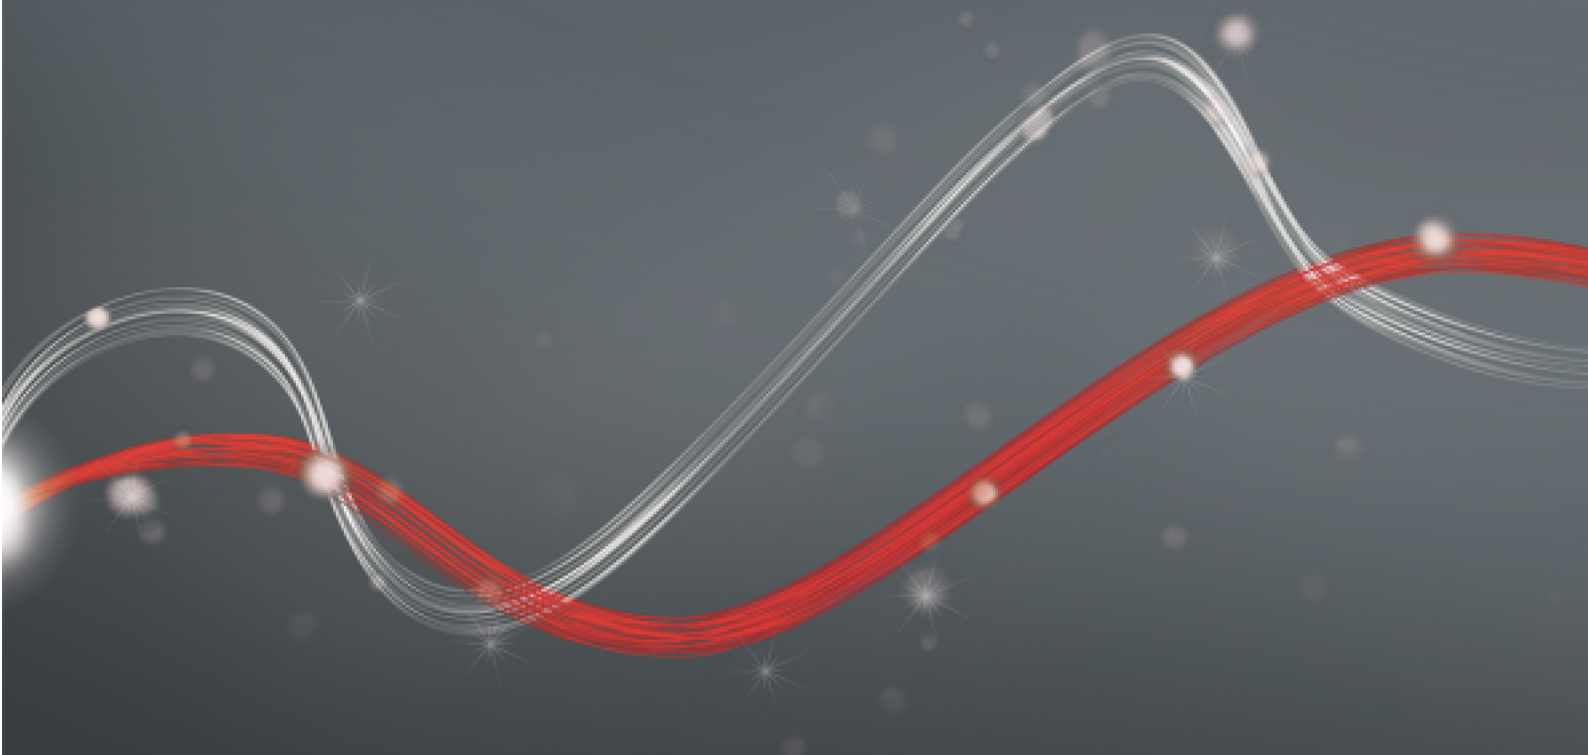



Automation systems for automatic pedestrian doors

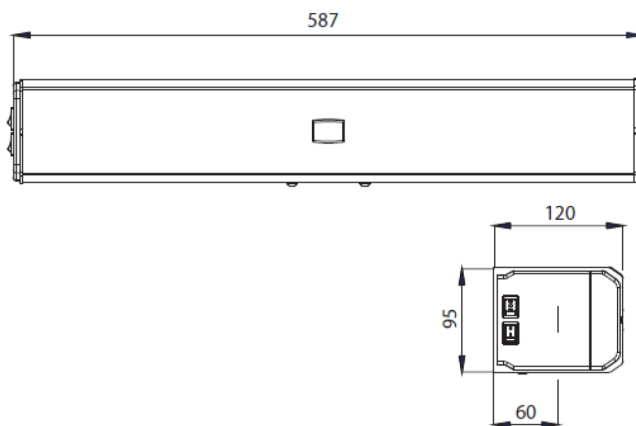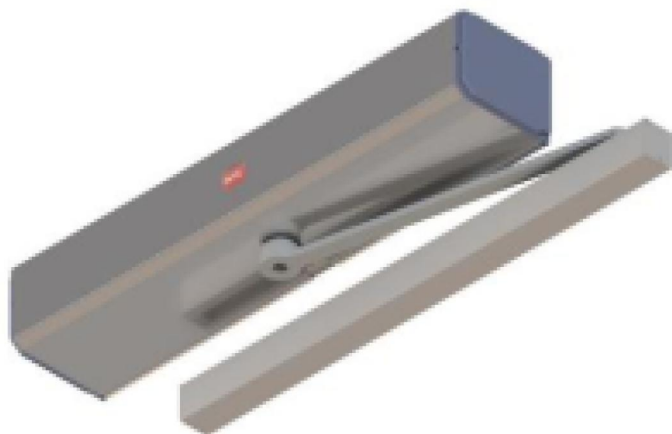

A range of automated operators for pedestrian swing doors, which can also be used to automate existing accesses and is ideal for intensive use, heavy and large doors with a weight up to 260 kg.
Available both with motorized control of opening and closing that with management of closure spring

Relevant features



EN 16005

Full compliance with standard EN 16005 (Power operated pedestrian doorsets. Safety in use)



Can also be adapted for special architectural solutions (e.g. restricted space) thanks to the compact size of the operator and its modern and simple appearance.



Highly reliable over time and no maintenance required thanks to the self-lubricating chain transmission system.



Automation systems for automatic pedestrian doors


Relevant features




Simply rotate to ensure complete left-right reversibility of the automation thanks to the central position of the motor shaft.




Reduction in assembly times using the arms pre-installed on the standard extension. Different adaptor lengths available to suit special requirements.




Easy to adjust pre-load by directly adjusting the arm thanks to the special closing spring (SXL version).



Direct access to the control unit's terminal block to simplify wiring tasks.



Quick connections for configuration with double leaf gate. The two control units can be connected with a single dedicated cable.



Option to also install the back-up battery inside the SXL version.




Automation systems for automatic pedestrian doors

Relevant features



Fully compatible with a selection of sensors, switches, VISTA SEL SW programmer from the BFT range.

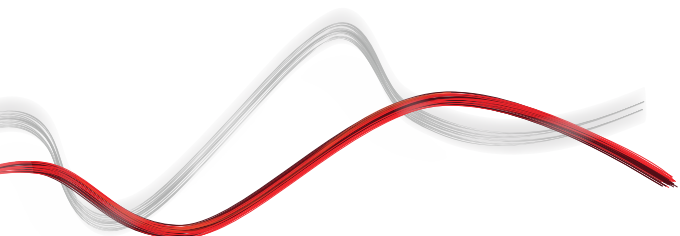







Automation systems for automatic pedestrian doors

VISTA SW 260

Code	Name	Description
P960666 00002	VISTA SW 260 MXL	Operator for swing doors with motor-driven opening and closing. Maximum gate panel weight 260 kg. Ideal for "fail safe" installations (optional battery)
P960667 00002	VISTA SW 260 SXL	Operator for swing doors with motor and spring closure. Maximum gate panel weight 260 kg. Ideal when the gate must be closed even when there is no power supply. In this case, the spring allows for manual opening and automatic mechanical closing.

	VISTA SW 260 MXL	VISTA SW 260 SXL
Clear opening	600 ÷ 1400 mm	600 ÷ 1400 mm
Maximum gate panel weight	260 kg	260 kg
Beam dimensions	587 x 120 x 95 mm	587 x 120 x 95 mm
Number of gate panels	1	1
Shaft max output torque	35 Nm	35 Nm
Maximum opening angle	110 °	110 °
Opening speed	up to 70°/sec	up to 70°/sec
Closing speed	up to 40°/sec	up to 40°/sec
Operator weight	9 kg	9 kg
Motor type	Dunker motor	Dunker motor
Motor voltage	24 V	24 V
Power supply system	230V ±10% AC 50/60Hz	230V ±10% AC 50/60Hz
Nominal power	85 W	85 W
Control unit	Digital display and dip switch	Digital display and dip switch
Emergency operation	with battery (optional)	with battery (optional)
Type of limit switch	encoder	encoder
Anti-crushing function	Force automatically limited in presence of obstacles	Force automatically limited in presence of obstacles
Locking	Solenoid Lock	Solenoid Lock
Manual cycle	Reversible	Reversible
Use cycle	Continuous	Continuous
Temperature range	-10 ÷ 50 °C	-10 ÷ 50 °C
Protection rating	IP40	IP40














RECOMMENDED ACCESSORIES

	P111790 - ASW 260 XL RIG Rigid pull arm Vista SW 260 XL.		P111791 - ASW 260 XL ART Articulated push arm Vista SW 260 XL.
	P111792 - EXT ASW350 260 XL L=90 Arm connection L=90 mm Vista SW XL, spacer		P111796 - EXT ASW350 260 XL L=110 Arm connection L=110 mm Vista SW XL, spacer



Automation systems for automatic pedestrian doors

RECOMMENDED ACCESSORIES

	P111797 - EXT ASW350 260 XL L=130 Arm connection L=130 mm Vista SW XL, spacer		P111795 - BBV SW 260 Emergency battery kit VISTA SW 260.
	P111794 - ASW 260 XL ARTL ARTIC. ARM PUSH LONG SW 260 Articulated push arm Vista SW 260 XL.		P111793 - TSWP XL 260 PROFILES VISTA SW 260 DUAL Profiles Vista SW double, 1.5 m.
	D113789 - VISTA SEL SW Function selector Vista SW		P111657 00001 - 4SAFE IR SAFETY SENSOR MONIT.SW/1MOD/700 Monitored IR safety sensor for side-hung leaves, 1 module, 700 mm
	P111657 00002 - 4SAFE IR SAFETY SENSOR MONIT.SW/2MOD/700 Monitored IR safety sensor for side-hung leaves, 2 modules, 700 mm		P111657 00003 - 4SAFE IR SAFETY SENSOR MONIT.SW/2MOD/900 Monitored IR safety sensor for side-hung leaves, 2 modules, 900 mm
	P111656 - VIO-ST Infrared safety sensor, monitored		P111662 - VIO-M Compact mono-directional activation sensor
	P111756 - OA-EDGE T 340 1M Active infrared sensor for security L 340 mm with 1 module with safety test		P111757 - OA-EDGE T 700 1M Active infrared sensor for security L 700 mm with 1 module with safety test
	P111758 - OA-EDGE T 1200 2M Active infrared sensor for security L 1200 mm with 2 modules with safety test		P111759 - OT 3 Elbow-operated pushbutton, silver



Automation systems for automatic pedestrian doors

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems.

In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Automation systems for automatic pedestrian doors

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.

Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

