




Be ahead

MAXIMA ULTRA 68



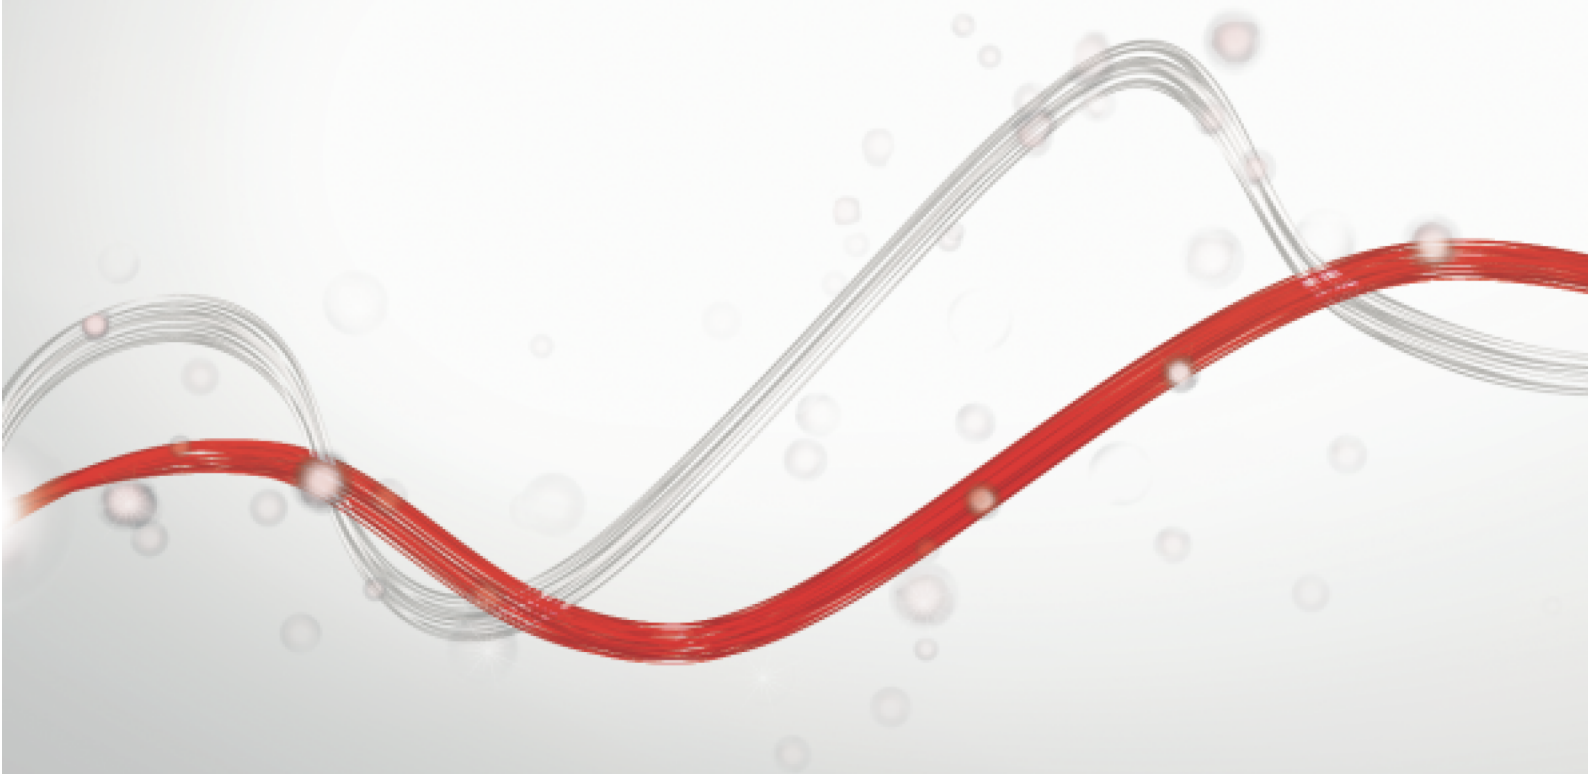

MAXIMA ULTRA 68




Automatic barriers - road barriers



U-Link



Empowered by
U-LINK

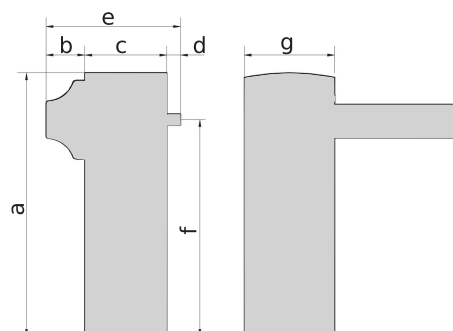

	a	b	c	d	e	f	g
MAXIMA ULTRA 68 / MAXIMA ULTRA 68 SM	1155	170	360	60	590	950	400

Range of professional 230 Vac electromechanical barriers with speed variator and three-phase induction motor for high frequency of use. Designed and developed to operate in a wide variety of conditions such as large car parks, motorway tollgates with frequent reversing, industrial installations.

Three-phase motor with inverter. Oil bath gear motor.

Mechanical crankshaft movement (anti-vandalism system) which can deliver fluidity of movement and balance to the bar by also controlling its soft opening and closing.

With U-Link protocol for integration with Parking Management or Building Management systems.

Relevant features

U-Link embedded.



MAXIMA ULTRA 68



Automatic barriers - road barriers



Empowered by
U-LINK

MAXIMA ULTRA 68

Code	Name	Description	
P940074 00002	MAXIMA ULTRA 68 SM	230 V electromechanical barrier with asynchronous three-phase motor and inverter, for controlling from 4 to 8 m gates. Opening time from 4.5 to 6 s with deceleration. Maximum barrier length: 8 m. Suitable for installation in areas with high frequency of movement and frequent inversion of barrier movement (e.g. motorway toll booths, car parks with high traffic flows, etc.). Version without spring. Colour RAL 7015 U-Link embedded. Three-phase motor with inverter. Anti-vandalism system mechanical crankshaft. Oil bath gear motor.	U-Link
P940074 00102	MAXIMA ULTRA 68 SM - RAL	230 V electromechanical barrier with asynchronous three-phase motor and inverter, for controlling from 4 to 8 m gates. Opening time from 4.5 to 6 s with deceleration. Maximum barrier length: 5 m. Suitable for installation in areas with high frequency of movement and frequent inversion of barrier movement (e.g. motorway toll booths, car parks with high traffic flows, etc.). Version without spring. RAL colour to order U-Link embedded. Three-phase motor with inverter. Anti-vandalism system mechanical crankshaft. Oil bath gear motor.	U-Link
P940083	MAXIMA ULTRA 68 SM + ASS SPRING	230 V electromechanical barrier with asynchronous three-phase motor and inverter, for controlling from 4 to 8 m gates. Opening time from 4.5 to 6 s with deceleration. Maximum barrier length: 8 m. Suitable for installation in areas with high frequency of movement and frequent inversion of barrier movement (e.g. motorway toll booths, car parks with high traffic flows, etc.). Includes fitting of springs and balancing. Colour RAL 7015. U-Link embedded. Three-phase motor with inverter. Anti-vandalism system mechanical crankshaft. Oil bath gear motor.	U-Link
P940074 00109	MAXIMA ULTRA 68 SM + ASS SPRING RAL	230 V electromechanical barrier with asynchronous three-phase motor and inverter, for controlling from 4 to 8 m gates. Opening time from 4.5 to 6 s with deceleration. Maximum barrier length: 8 m. Suitable for installation in areas with high frequency of movement and frequent inversion of barrier movement (e.g. motorway toll booths, car parks with high traffic flows, etc.). Includes fitting of springs and balancing. RAL colour to order U-Link embedded. Three-phase motor with inverter. Anti-vandalism system mechanical crankshaft. Oil bath gear motor.	U-Link

CSB XT: 24V single operator control unit for barriers

CSB XT - I271514 70001 - Built-in - (Spare part code, available for order through the Technical Support network)



- Card power supply: 230 V single-phase
- Main characteristics: removable terminal boards with the new colour standard, simplified programming with scenario display, integrated two-channel receiver, D-Track based antisquashing system and slowdown during opening or closing.
- 24V single operator control unit for barriers

	MAXIMA ULTRA 68 SM	MAXIMA ULTRA 68 SM - RAL	MAXIMA ULTRA 68 SM + ASS SPRING	MAXIMA ULTRA 68 SM + ASS SPRING RAL
Opening time (depending on the width of the leaf)	from 4.5 to 6 s	from 4.5 to 6 s	from 4.5 to 6 s	from 4.5 to 6 s
Clear opening	from 4 to 8 m	from 4 to 8 m	from 4 to 8 m	from 4 to 8 m
Control unit	CSB Xtreme	CSB Xtreme	CSB Xtreme	CSB Xtreme
Motor type	Three-phase asynchronous	Three-phase asynchronous	Three-phase asynchronous	Three-phase asynchronous
Motor power supply	230 V	230 V	230 V	230 V
Internal lubrication	In oil bath	In oil bath	In oil bath	In oil bath
Inverter	Yes	Yes	Yes	Yes
Slowdown	Yes	Yes	Yes	Yes
Impact reaction	encoder	encoder	encoder	encoder
Locking	Mechanical	Mechanical	Mechanical	Mechanical
Release	Inside the structure	Inside the structure	Inside the structure	Inside the structure
Frequency of use	very intensive	very intensive	very intensive	very intensive



MAXIMA ULTRA 68




Automatic barriers - road barriers



Empowered by
U-LINK

	MAXIMA ULTRA 68 SM	MAXIMA ULTRA 68 SM - RAL	MAXIMA ULTRA 68 SM + ASS SPRING	MAXIMA ULTRA 68 SM + ASS SPRING RAL
MCBF (Mean Cycles Between Failures)	2000000 Op	2000000 Op	2000000 Op	2000000 Op
Environmental conditions	-30 ÷ 60 °C	-30 ÷ 60 °C	-30 ÷ 60 °C	-30 ÷ 60 °C
Protection rating	IP54	IP54	IP54	IP54

VITAL ACCESSORIES

	P120059 - MLC7.5 White spring - MAXIMA Ultra 68. Ref. spring table		P120060 - MLC9 Yellow spring - Maxima Ultra 68. Ref. spring table
	P120061 - MLC9.5 Purple spring - Maxima Ultra 68. See springs table		P120041 - ATML60 Aluminium bar L = 6 m Ø92 mm. Lights and rubber not included. Completely protected by new polystyrene packaging.
	P120041 00001 - ATML60 Aluminium bar L = 6 m Ø92 mm. Lights and rubber not included. Completely protected by new polystyrene packaging.		P120042 - ATML EXT2 Extension L=2m for bar model ATML 60. Lights and rubber not included.
	P120046 00001 - OMEGA ATML U Single clamping, hand guard and screws for ATML bar on MAXIMA 68 ULTRA. Bar not included.		P120047 00001 - OMEGA FRC ATML U Fork clamping for ATML bar on barrier model. MAXIMA 68 ULTRA. Bar not included.
	P120053 00002 - PCA ATM 5 Rubber protection (red) for fitting on bar L = 5 m max.		P120053 00003 - PCA ATM 8 Protection rubber (black) for fitting on bars from L = 6+8 m.

RECOMMENDED ACCESSORIES

	P120077 00001 - KIT ATM LIGHT 3 R/G 2W Red-green LED lights kit for fitting on ATM bars up to 3m.		P120077 00002 - KIT ATM LIGHT 5 R/G 2W Red-green LED lights kit for fitting on ATM bars up to 5m.
	P120077 00003 - KIT ATM LIGHT 8 R/G 2W Red-green LED lights kit for fitting on ATML bars up to 8 m.		P120050 - GA ATM Adjustable suspended foot, powder coated cataphoresis treated.
	P120049 - RST ATM Aluminium rack. Price for 3 metres. Suspended foot not included. Compatible with ATML and ATM model bars.		P120032 - SRV DIN Standard DIN rail for interfacing barrier with parking system, configured and prewired with thermal magnetic switch, additional supply terminals, socket for metal mass detector and standard input/output terminal block
	P111001 00003 - RME 2 230 V dual channel metal object detector with installation base		P120035 - FCS MU68 2 additional limit switches for Maxima Ultra 6 - 8 m



MAXIMA ULTRA 68




Automatic barriers - road barriers



RECOMMENDED ACCESSORIES

	P111274 - RME 1 BT					
	24 V single channel metal object detector with installation base					

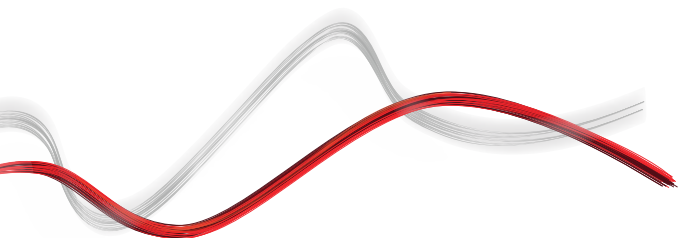



Automatic barriers - road barriers



Empowered by
U-LINK

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems.

In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Automatic barriers - road barriers



Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.




U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

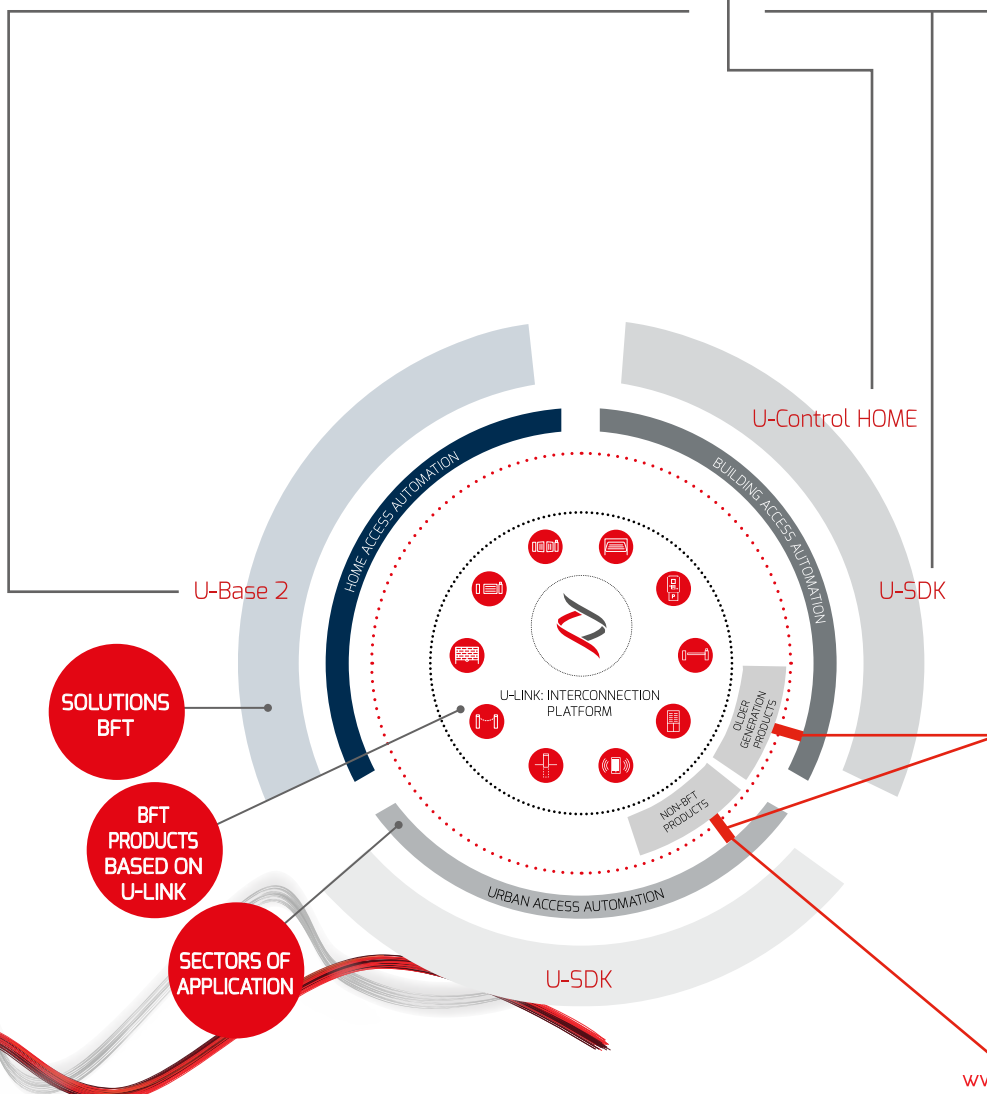



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.