



Be ahead

MAXIMA






MAXIMA




Automatic barriers - road barriers

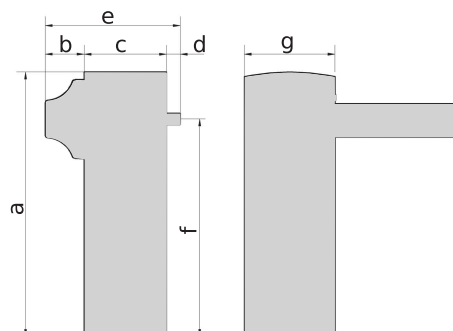

	a	b	c	d	e	f	g
MAXIMA 30	1110	120	320	40	480	950	280
MAXIMA 60 / MAXIMA 80	1155	170	360	60	590	950	400

Linija profesionalnih elektromehaničkih rampi od 230 V AC, za učestalu upotrebu, dizajniranih za rad u raznim uvjetima, uključujući velika parkirališta, naplatne kućice na autocesti u kojih je čest obrnut rad, industrijske instalacije. Mehaničko gibanje pomoću ručice kako bi letva nesmetano i skladno radila; također se upravlja usporavanjima pri otvaranju i zatvaranju.

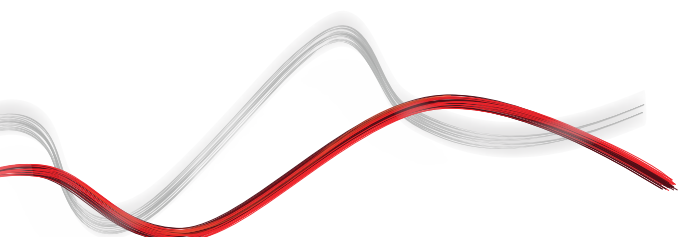



Automatic barriers - road barriers

MAXIMA

Šifra	Naziv	Opis
P940070	MAXIMA 30	230 V electromechanical barrier for controlling from 1.7 to 3 m gates. Opening time 1.7 s with deceleration. Maximum barrier length: 3 m. Suitable for installation in areas with high frequency of movement and reversals of direction (e.g. car parks with high traffic flows, etc.). Colour RAL 7015. Brza rampa.
P940070 00102	MAXIMA 30 - RAL	230 V electromechanical barrier for controlling from 1.7 to 3 m gates. Opening time 1.7 s with deceleration. Maximum barrier length: 3 m. Suitable for installation in areas with high frequency of movement and reversals of direction (e.g. car parks with high traffic flows, etc.). RAL colour to order. Brza rampa.
P940071	MAXIMA 60	230 V industrial electromechanical barrier for controlling from 4 to 6.4 m gates. Opening time 8 s with deceleration. Maximum barrier length 6 m. Option to fit single or dual barrier bracket. Colour RAL 7015. Intenzivna prepreka.
P940071 00102	MAXIMA 60 - RAL	230 V industrial electromechanical barrier for controlling from 4 to 6.4 m gates. Opening time 8 s with deceleration. Maximum barrier length 6 m. Option to fit single or dual barrier bracket. RAL colour to order. Intenzivna prepreka.
P940072	MAXIMA 80	230 V industrial electromechanical barrier for controlling from 6.5 to 8 m gates. Opening time 9 s with deceleration. Maximum barrier length 8 m. Option to fit single or dual barrier bracket. Colour RAL 7015. Širok prostor za prolaz.
P940072 00102	MAXIMA 80 - RAL	230 V industrial electromechanical barrier for controlling from 6.5 to 8 m gates. Opening time 9 s with deceleration. Maximum barrier length 8 m. Option to fit single or dual barrier bracket. RAL colour to order. Širok prostor za prolaz.

	MAXIMA 30	MAXIMA 30 - RAL	MAXIMA 60
Korisni prolaz	od 1.7 do 3 m	od 1.7 do 3 m	od 4 do 6.4 m
Upravljačka jedinica	CSB-BR	CSB-BR	CSB-BR
Tip motora	Jednofazno	Jednofazno	Jednofazno
Napajanje motora	230 V	230 V	230 V
Usporavanje	Da	Da	Da
Reakcija na udar	Elektronički magnetski reverzer	Elektronički magnetski reverzer	Elektronički magnetski reverzer
Blokada	Mehanički	Mehanički	Mehanički
Deblokada	Unutar konstrukcije	Unutar konstrukcije	Unutar konstrukcije
Broj otvaranja	vrlo intenzivan	vrlo intenzivan	intenzivan
MCBF (Mean Cycles Between Failures)	5000000 Op	5000000 Op	2000000 Op
Vanjski uvjeti	-30 ÷ 60 °C	-30 ÷ 60 °C	-30 ÷ 60 °C
Stupanj zaštite	IP54	IP54	IP54

	MAXIMA 60 - RAL	MAXIMA 80	MAXIMA 80 - RAL
Korisni prolaz	od 4 do 6.4 m	od 6,5 do 8 m	od 6,5 do 8 m
Upravljačka jedinica	CSB-BR	CSB-BR	CSB-BR
Tip motora	Jednofazno	Jednofazno	Jednofazno
Napajanje motora	230 V	230 V	230 V
Usporavanje	Da	Da	Da
Reakcija na udar	Elektronički magnetski reverzer	Elektronički magnetski reverzer	Elektronički magnetski reverzer
Blokada	Mehanički	Mehanički	Mehanički
Deblokada	Unutar konstrukcije	Unutar konstrukcije	Unutar konstrukcije
Broj otvaranja	intenzivan	intenzivan	intenzivan



Automatic barriers - road barriers

	MAXIMA 60 - RAL	MAXIMA 80	MAXIMA 80 - RAL
MCBF (Mean Cycles Between Failures)	2000000 Op	2000000 Op	2000000 Op
Vanjski uvjeti	-30 ÷ 60 °C	-30 ÷ 60 °C	-30 ÷ 60 °C
Stupanj zaštite	IP54	IP54	IP54

	P120102 00001 - ATM25 Aluminijska letva L=2,5 m s padajućim profilom i crvenim reflektorima. Svjetla i zaštitna guma nisu uključeni. Potpuno zaštićeni novom polistirolnom ambalažom.		P120102 00002 - ATM30 Aluminijska letva L=3 m s padajućim profilom i crvenim reflektorima. Svjetla i zaštitna guma nisu uključeni. Potpuno zaštićeni novom polistirolnom ambalažom.
	new P120041 00001 - ATML60 Aluminijska letva D = 6 m Ø92 mm. Svjetla i guma su isključeni. Potpuno je zaštićena novom ambalažom od polistirola.		P120042 - ATML EXT2 Produžetak od L=2 metara za letvu mod. ATML 60. Svjetla i guma isključeni.
	new P120043 00001 - OMEGA AT Kućiste sa zaštitom za ruke s jednom bravom i vijci za pregradu ATM na proizvodu Maxima 30. Rampa nije uključena.		new P120044 00001 - OMEGA ATML Prihvat letve ATML na sustavu MAXIMA 60/80. Letva nije uključena.
	new P120045 00001 - OMEGA FRC ATML Viličasti prihvat za letvu ATML na rampi mod. MAXIMA 60/80. Letva nije uključena.		P120053 00001 - PCA ATM 3 Zaštitna guma (crvena) za montiranje na letvu maksimalne L = 3 m.
	P120053 00002 - PCA ATM 5 Zaštitna guma (crvena) za montiranje na letvu maksimalne L = 5 m.		P120053 00003 - PCA ATM 8 Zaštitna guma (crne boje) za montiranje na brklje D = 6 ÷ 8 m.

PREPORUČENA DODATNA OPREMA

	P120077 00001 - KIT ATM LIGHT 3 R/G 2W Komplet crveno-zelenih LED lampica za montiranje na letve ATM duljine do 3 metara.		P120077 00002 - KIT ATM LIGHT 5 R/G 2W Komplet crveno-zelenih LED lampica za montiranje na letve ATM duljine do 5 metara.
	P120077 00003 - KIT ATM LIGHT 8 R/G 2W Komplet crveno-zelenih LED lampica za montiranje na letve ATML duljine do 8 metara.		P120083 - ALLU2 Maxima Jedinica napajanja za komplet ATM LIGHT na sustavu Maxima Ultra
	P120078 - IS ATML Unutarnje ojačanje za letve ATML		P120109 00001 - ATM30 90° Zglobna rampa koja se uzdiže do 3 m, prolaz od 90°. Ne uključuje svjetla i gumu.
	new P120065 00001 - ATM30 90° RG Zglobna brklja od 90 ° 3 m uklj. sa svjetlima R/G		new P120048 00001 - OMEGA ATM FRA Prihvat letve za ATM letvu
	new P120073 - ATM ARTICULATED JOINT + TIE ROD KIT Kit for 90° articulated bar. Does not includes lights and rubber.		P120033 - FCS MAXIMA 5 2 dodatna graničnika za MAXIMA 30/MAXIMA ULTRA 35



Automatic barriers - road barriers

PREPORUČENA DODATNA OPREMA

	P120034 - FCS MAXIMA 6-8 2 dodatna graničnika za MAXIMA 60/80		P120049 - RST ATM Aluminijska rešetka. Cijena za 3 metra. Viseća nožica nije uključena. Kompatibilne s letvama mod. ATML i ATM.
	P120050 - GA ATM Viseći, podesivi nogar letve obrađeno postupkom kateforeze i plastificirano.		P120080 - FAF UNIR Univerzalna vilica za sve letve; preporučuje se uz postavljanje dodatka FULL SKIRT.
	P120079 - EBB KIT ATML Električna brava za letve ATML koje će se postaviti na prilagodljivu vilicu FAF UNIR.		P120032 - SRV DIN Vodilica u skladu s DIN standardom za povezivanje rampe na parkirališni sustav, konfigurirana i unaprijed ožičena s automatskim prekidačem, dodatnim terminalima za napajanje, priključkom za detektor metalnih masa i standardnim input/output terminalnim priključkom.
	P111001 00003 - RME 2 Jednokanalni detektor za metalne mase 230 V, s instalacijskom osnovom		P111786 - LOOP DETECTOR PRO 230V Detektor metalnih predmeta, 2 kanala, 24 V DC/AC, do 4 frekvencije po kanalu za postavljanje pridruženih zavojnica, prilagodljiva razina osjetljivosti, funkcija pojačanja za povećanje osjetljivosti, upravljanje smjerom kretanja
	D110926 00001 - SPIRA 2X1 Induktivna petlja 2 x 1 m		P111274 - RME 1 BT Jednokanalni detektor za metalne mase 24 V s instalacijskom osnovom



Automatic barriers - road barriers

Što je U-Link?

Tehnologija koja vam daje više snage

U-Link (Univerzalna poveznica) ekskluzivna je platforma poduzeća BFT koja se može upotrebljavati za stvaranje visokotehnoških ekosustava.

U automatizaciji pristupa domu može se upotrebljavati za komuniciranje sa svim uređajima automatizacije pristupa domu bilo koje marke.

Time štedite na vremenu te možete jednostavno i bezbrižno svim upravljati.

Platforma je intuitivna

Jednostavno ju je ugraditi i rabiti

Platforma je skalabilna

Možete dodati uređaja koliko god želite

Platforma je prilagodljiva

Možete stvarati grupe međupovezanih proizvoda

Platforma je praktična

Radi sa ili bez internetskog priključka

Platforma je funkcionalna

Postavkama je moguće upravljati na daljinu upotrebom namjenskih aplikacija



Automatic barriers - road barriers

Sve na jednom zaslonu: saznaj više o ovoj nevjerojatnoj tehnologiji

Platforma ekskluzivna u svijetu koja se **može upotrebljavati za stvaranje visokotehnoloških ekosustava** i kojom se pruža širok raspon rješenja za razna područja primjene.

Ova vlasnička platforma koja je ključna značajka proizvoda poduzeća BFT zbog kartica B-EBA i prijemnika Clonix U-Link prikladna je za svaki protokol ili proizvod za automatizaciju pristupa (uključujući proizvode poduzeća BFT, proizvode koji nisu od poduzeća BFT i proizvode starije generacije) i može se rabiti u širokom rasponu područja primjene. Time se podrazumijeva da bilo koji uređaj postaje pametni uređaj koji se može povezati s drugim sustavima upotrebom jezika koji postaje univerzalan.

**U-Control HOME**

U-Control HOME je aplikacija kojom se omogućuje otvaranje kućnih vrata i upravljanje na daljinu automatizacijama BFT Automation upotrebom pametnog telefona. Inačica za sustav iOS može se upotrijebiti za automatsko otvaranje automatizacije kada ste blizu nje.

**U-Base 2**

Softverski paket za instalaciju, provođenje održavanja i utvrđivanje kvarova operatora kompatibilnih s tehnologijom U-Link na jednostavan i praktičan način.

**U-SDK**

U-SDK je aplikacija kojom se omogućuje kompatibilnost i jednostavna integracija za automatizacije BFT Automation s mrežom BMS.

**Clonix U-Link**


Povežite neizvorne proizvode tehnologije U-Link i proizvode koji nisu od poduzeća BFT sa sustavima tehnologije U-Link.

Je li moguće povezati neizvorne operatore tehnologije U-Link poduzeća BFT ili druge marke proizvoda s tehnologijom U-Link? Da, zahvaljujući prijemnicima Clonix. Dodatci bez ograničenja.

**B-EBA**

Izravna poveznica s vašim operatorima.

Pločica B-EBA za proširenje omogućuje se povezivanje vanjskih uređaja kao što su osobna računala, pametni telefoni i tableti s operatorom poduzeća BFT i prijemnikom Clonix ili povezivanje nekoliko proizvoda poduzeća BFT u mreži tehnologije U-Link. Ti dodatci integriraju se s tehnologijom U-Link, protokolima Bluetooth, Z-Wave i TCP/IP te serijskim sučeljem RS485. Uređaj kojim se demonstrira točno što poduzeće BFT podrazumijeva pod međupovezanosti.

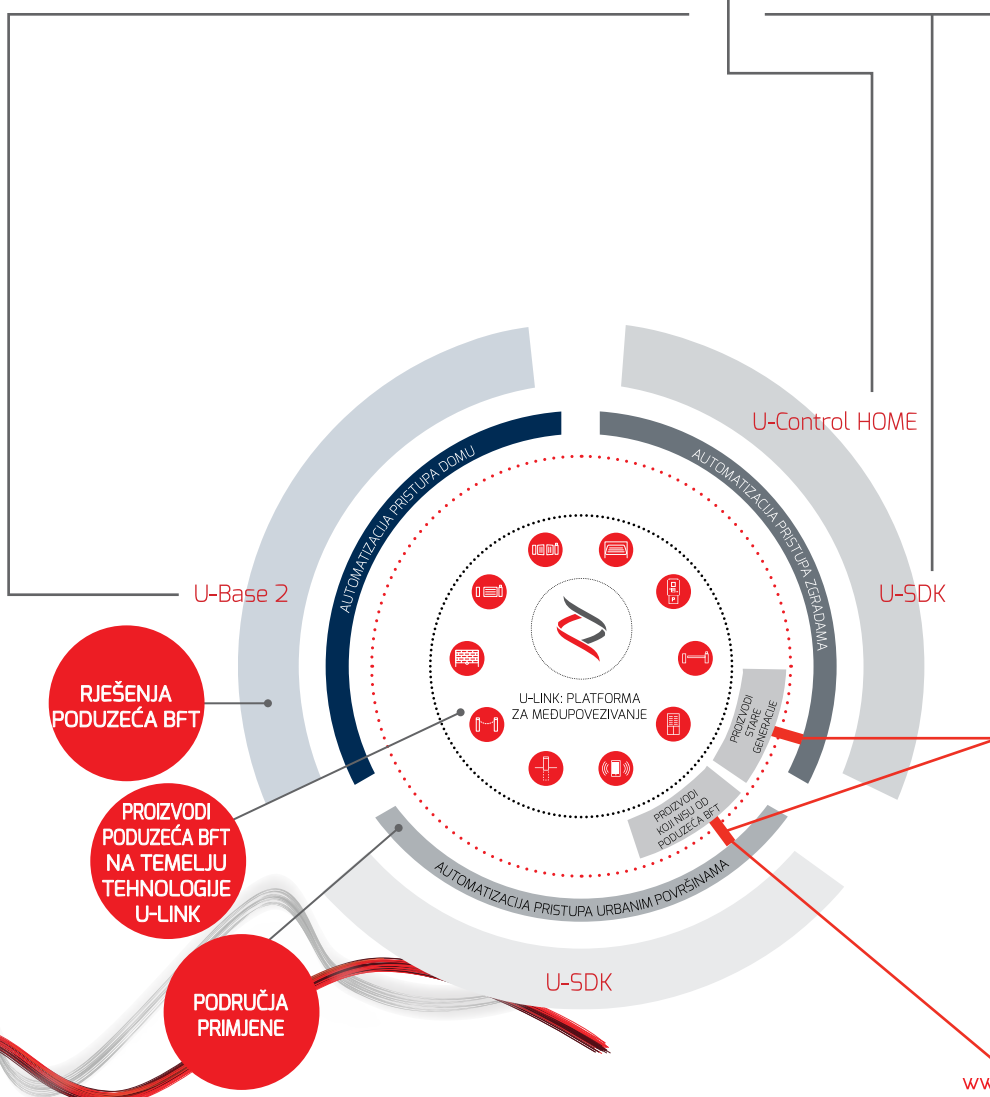



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.