



Be ahead



DAMPY B






DAMPY B




Parking and traffic bollards




DAMPY B
219/500
219/700



DAMPY B
115/500

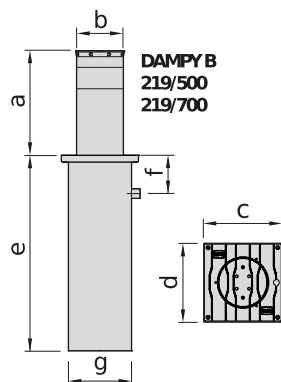

DAMPY B
219/500
219/700

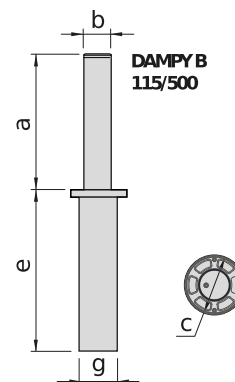

DAMPY B
115/500

	a	b	c	d	e	f	g
DAMPY B 219/500	490	Ø219	360	360	915	180	Ø295
DAMPY B 219/700	700	Ø219	360	360	1165	180	Ø295
DAMPY B 115/500	500	Ø114	Ø219	/	593	/	Ø168

Semi-automatic bollard driven by gas spring for controlling road access points. Competitive and easy to use. Also available with stainless steel shaft and light cap.




Parking and traffic bollards

DAMPY B

Code	Ci	Name	Description
P970085 00001	2605566	DAMPY B 219/500 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970085 00002	2605567	DAMPY B 219/500 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 490 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. 304 stainless steel version.
P970087 00001	2605571	DAMPY B 219/700 L	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. RAL 7015 painted steel version with LED light cap. Foundation box included. Cap with lights.
P970087 00002	2605572	DAMPY B 219/700 LI	Semi-automatic bollard with gas spring with shaft diameter 219 mm and height 700 mm. Impact resistance 15000 J. Stainless steel version with LED light cap. Foundation box included. Cap with lights. 304 stainless steel version.

	DAMPY B 219/500 L	DAMPY B 219/500 LI	DAMPY B 219/700 L	DAMPY B 219/700 LI
Rod height	490 mm	490 mm	700 mm	700 mm
Rod diameter	219 mm	219 mm	219 mm	219 mm
Rod thickness	5 mm	5 mm	5 mm	5 mm
Rod movement	Internal gas spring	Internal gas spring	Internal gas spring	Internal gas spring
Impact resistance	15000 J	15000 J	15000 J	15000 J
Break-in proof	150000 J	150000 J	150000 J	150000 J
Rod locking	With triangle key	With triangle key	With triangle key	With triangle key
Rod treatment	RAL 7015 cataphoresis coating and paint	AISI 304 stainless steel	RAL 7015 cataphoresis coating and paint	AISI 304 stainless steel

RECOMMENDED ACCESSORIES

	Sp P800104 - Ci 2607208 ALLU				
	Power supply for fixed bollards.				



DAMPY B



Parking and traffic bollards

EasyAXS

EASY CONNECT. EASY ACCESS.



The new connectivity solution which boosts the potential of BFT products and services to make access automations smarter and easier to use for both installers and end users.

1

EASY TO CONNECT



PLUG&PLAY
CONNECTIVITY MODULE
FOR QUICKLY CONNECTING
BFT SOLUTIONS



2

EASY TO SET UP



CONFIGURATION
AND
MANAGEMENT OF
THE MOTOR WITH
THE **EasyAXS app**

3

EASY TO CONTROL



TaHoma app
TO PROVIDE CUSTOMERS
WITH A SMART SOLUTION
FOR ACCESSING THEIR
HOMES





Parking and traffic bollards

EASY TO CONNECT

WIFI MODULE



→ 10/15 metres

WIFI MODULE + ANTENNA



→ 20/25 metres

MOBILE MODULE + ANTENNA + SIM



→ ∞



**PLUG&PLAY
INSTALLATION**



**ALWAYS
CONNECTED**



**EVEN MORE
CONNECTIVITY**



**EASY TO SET UP
FOR INSTALLERS**



**EASY TO CONTROL
FOR CUSTOMERS**





Parking and traffic bollards



U-LINK 2.0

AN UPDATED VERSION OF **U-LINK** TO GIVE YOU EVEN MORE FUNCTIONALITY



Scalable

You can add as many devices as you want



Intuitive

Easy to install and to use



Functional

Settings can be controlled and firmware updated remotely using dedicated applications



Practical

Works with or without an internet connection



Flexible

It allows you to create groups of interconnected products

U-Link, the exclusive **BFT** technology platform has evolved to offer improved interaction with the latest generation of technological ecosystems. Its ability to interface with all home access automation access devices has been expanded, meaning it is now a very useful tool for installers. It is also a faster communication protocol with increased security for communicating information.

It allows you to save even more time, checking everything very easily and giving you even more peace of mind.



Parking and traffic bollards



A NEW AND EVEN MORE SECURE RADIO PROTOCOL



Secure

By transmitting data protected by a cryptographic key

U-Security is the new technology from **BFT** which incorporates encrypted rolling code thanks to the encryption key which masks the remote control code, meaning that it is impossible to clone a BFT remote control using another brand's model.



Easy

Pairing a remote control with a receiver can be done easily by scanning the QR code and using the dedicated app

The functions of the **Er Ready** system are incorporated and a new procedure is also available for programming remote controls by scanning a QR CODE and using a special app. All products featuring this technology are **REPLAY**, so they can transmit the code to another BFT remote control using a combination of keys.



Universal

The radio protocol is also compatible with the previous generation of receivers

