



Be ahead




# RANCH R






## Parking and traffic bollards

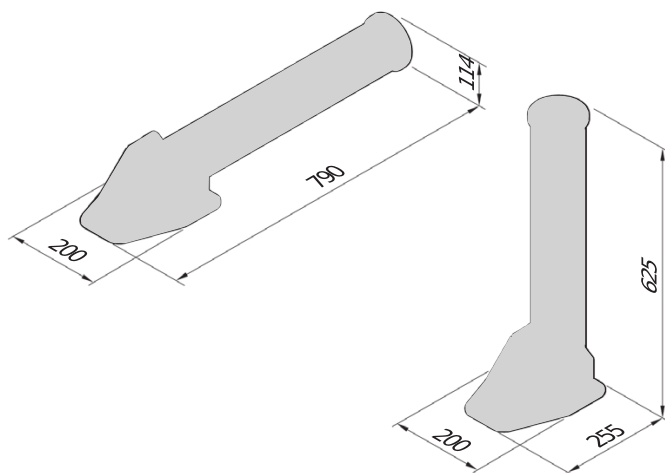

Tilting manual bollard for parking space saver application.

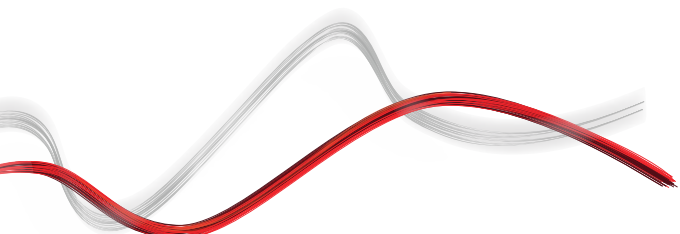




## Parking and traffic bollards

### RANCH R

Code	Name	Description
P970101	RANCH R Ø115-625 DISS. RIBALT.	Manual fold down bollard with shaft diameter 114 mm and height 625 mm.

	RANCH R Ø115-625 DISS. RIBALT.
Rod treatment	RAL 7015 cataphoresis coating and paint
Operator type	manual bollards
Rod height	625 mm
Rod diameter	114 mm

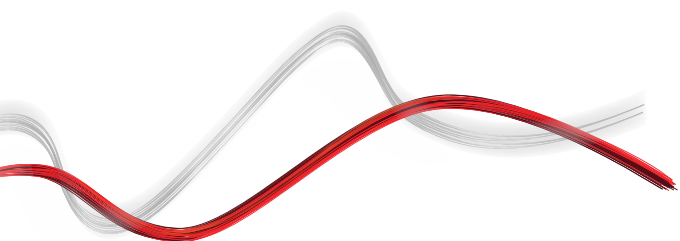



Parking and traffic bollards

# What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems.

In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

## It is intuitive

Easy to install and to use

## It is scalable

You can add as many devices as you want

## It is flexible

It allows you to create groups of interconnected products

## It is practical

Works with or without an internet connection

## It is functional

Its settings can be controlled remotely using dedicated applications



## Parking and traffic bollards

# Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



### U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



### U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



### U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



### Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.

Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



### B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

