



Be ahead



RIGEL



Control panels




Universal control board with display for one or two swing or sliding door operators, 230V - 650+650W.

Main features: removable terminal blocks, programming and diagnostics with display, built-in four-channel receiver, electro lock, electronic torque limiter, electronic deceleration at opening and closing, a separate limit switch inputs for each motor, traffic light management, preheating hydraulic operators, weekly timer, possibility to delete a specific remote control, customization of the 4 radio channels, personalization of the duration of the delayed output, adjustable sensitivity to the obstacle.

RIGEL


| Code | Ci | Name | Description |
|---------------|---------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D113833 00002 | 2600589 | RIGEL 6 220-230V 50/60HZ | Universal control panel with display for one or two 230V - 650+650W operators Weekly timer, cancellation of single remote control, customisation of personalised output duration, obstacle sensitivity adjustment, configurability of 4 radio channels. |

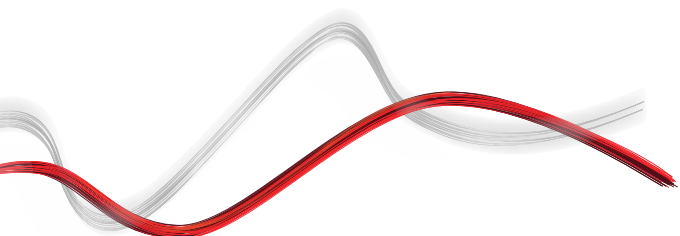

Control panels



| RIGEL 6 220-230V 50/60HZ | |
|----------------------------------------|------------|
| BASIC CHARACTERISTICS | |
| Maximum output | 750 W |
| Board power supply | 220-230 V |
| Max. n. transmitters | 63 |
| Programming | Display |
| Power supply accessories | 24V - 1A |
| CONFIGURATION OF SAFETY INPUTS | |
| Light sensor | ● |
| Safety edge | ● |
| Resistive edge | ● |
| Tested photocell | ● |
| Tested safety edge | ● |
| Stop | ● |
| CONFIGURATION OF CONTROL INPUTS | |
| Start | ● |
| Traffic light control | ● |
| Open | ● |
| Close | ● |
| Pedestrian open | ● |
| Open with timer | ● |
| Pedestrian open with timer | ● |
| OUTPUTS | |
| Blinker | 230V - 80W |
| Configurable AUX 1 | ● |
| Configurable AUX 2 | ● |
| Configurable AUX 3 | ● |
| Solenoid Lock | 12V |
| OUTPUTS CONFIGURATION | |
| Gate open warning light | ● |
| Zone light | ● |
| Electric release lock | ● |
| Electric magnetic lock | ● |
| Maintenance | ● |
| Flashing + Maintenance | ● |
| Gate status | ● |
| Bistable radio channel | ● |
| Time delay radio channel | ● |
| Gate open alarm | ● |
| Blinker | ● |
| Stairs light | ● |
| Courtesy light | ● |


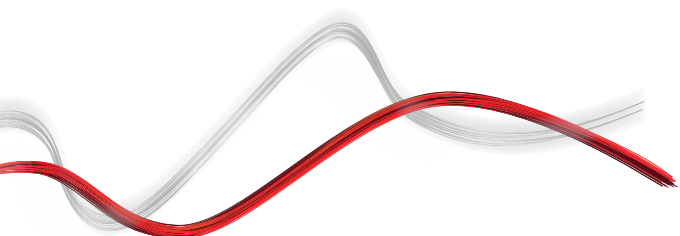


Control panels



Connecting diagram

D113833 00002 - RIGEL 6 220-230V 50/60HZ

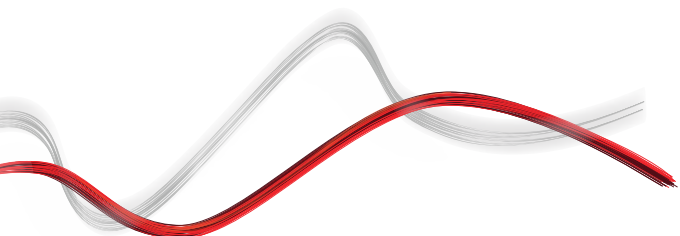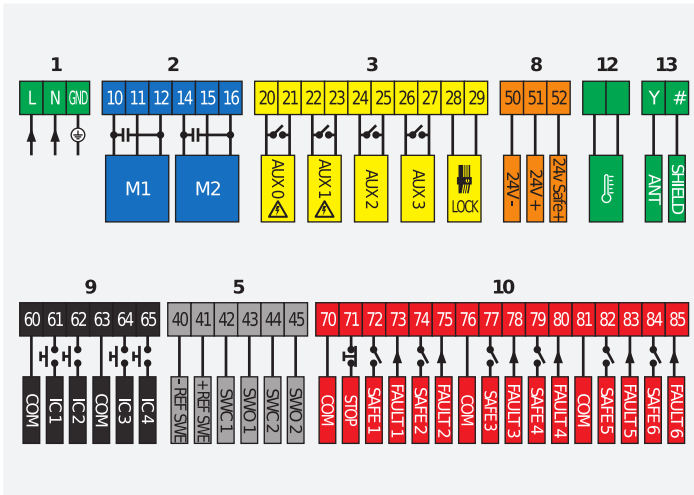



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. **FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.**